

Solace

3" Shallow Square Adjustables



PROJECT:




TYPE:

Features

Solace 3" Downlights are the complete downlight family for any ceiling surface and low plenum ceiling. Round or Square apertures, available as downlight, adjustable or wallwash. Optional Solite lensing provides whisper quiet aesthetics. The trim options available as trimmed, trimless or millwork. The pinhole and shower pinhole trim makes this a complete a downlight to design the entire space with the same look.

Product Overview

Type: Shallow Square Adjustable
 Wattage: 8W, 12W, 17W
 Color Temp: 2700K, 3000K, 3500K, 4000K
 CRI: 83 typ. or 90+ typ.
 3K Class A available
 Dimming: TRIAC & ELV, 5% Dim, 120/277VAC
 0-10V, 1% Dim, 120/277VAC
 Lutron Hi-lume® EcoSystem Premier, 0.1% dim with soft on & fade to black, 120/277VAC *(Consult factory for Lutron lead time)*



Certifications



5 year limited warranty
 AMERLUX LED



Fixture Summary

Fixture Type

Round/Square	New Construction	Trim	Trimless	Millwork
Yes	Yes	Yes	Yes	Yes

See separate spec sheet for Round trims.

Performance Data (see page 5 for full breakdown)

Watts	Delivered Lumens	LPW	CBCP	Color Temp-CRI
8	840	100	3826	3000K-83
12	1236	99	5630	3000K-83
17	1584	94	7218	3000K-83

Data is based on 3000K-83 120V IES files available on website.

Data is based on Flood optic (no Solite). See pg 6-8 for other beam spreads.

Electrical Data

	8W		12W		17W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	8	0.067	12	0.10	17	0.142
277V	8	0.029	12	0.043	17	0.061

Electronic constant current LED driver.

PROJECT:

TYPE:

Ordering Information - Housing/Frame

120/277							
1	2	3	4	5	6	7	8
1 Model				2 Style		3 Wattage	
SOL-SA-NC (New Construction & Insulated Ceiling (IC rated))				T trimmed (2" max ceiling thickness)		8 (840 lm)	
SOL-SA-CP (Chicago Plenum (CCEA) housing)				TL trimless (5/8" max ceiling thickness)		12 (1236 lm)	
SOL-SA-IC ^{T24} (Insulated Ceiling (IC)/air tight)				MWK millwork (for 1/2" - 11/16" ceiling thickness)		17 (1584 lm)	
				MWK1 millwork (for 3/4" - 1-1/2" ceiling thickness)		(Lumen data based on 3000K-83, FL optic. See pg 5 for other performance data)	
				MWK2 millwork (for 1-1/2" - 2" ceiling thickness)			
4 Voltage		5 Beam Spread		6 Color Temp			
120/277 (universal voltage)		SP spot, 15°		83 CRI90+ CRI ^{T24}			
		FL flood, 25°		27 2700K-83279 2700K-90+3CLA* 3000K Class A			
		WF wide flood, 36°		30 3000K-83309 3000K-90+			
		VWF very wide flood, 55°		35 3500K-83359 3500K-90+			
				40* 4000K-83409* 4000K-90+			
				* Consult factory for lead time.			
7 Driver (for non-dimming, select LE/TE option)				8 Options/Accessories			
LE/TE ^{T24} TRIAC/ELV dimming				HB49 - hanger bars from min 29" to max 49"			
0-10V ^{T24} 0-10V dimming, 1% dim				(26" hanger bars included as default options)			
HILUME-P-ECO - Lutron Hi-lume® EcoSystem Premier 0.1% dim with soft on & fade to black				Note: 26" hanger bars are included as standard.			
(Consult factory for Lutron lead time)				Choose HB49 option above for larger mounting spaces only.			

Ordering Information - Trim

120/277			
1	2	3	4
1 Model SOL-SA ^{T24} (downlight) SOL-SPA (pinhole downlight) SOL-SPASHW (pinhole downlight shower)		2 Style T trimmed TL trimless (not available for use with shower trim) MWK millwork (not available for use with shower trim)	
3 Finish SA Trim Trimmed Trimless/Millwork MBW matte black, white flange MB matte black MWW matte white, white flange MW matte white SLVW matte silver, white flange SLV matte silver MBB matte black, black flange SLVS matte silver, silver flange SPA/SPASHW Trims (T/TL/MWK) MB matte black MW matte white SLV matte silver		4 Options/Accessories SOL solite beam softening lens (comes standard with SPASHW trim, not JA8/Title 24 compliant)	

^{T24} JA8/Title 24 Compliant

PROJECT:

TYPE:

Specifications

Application

Retail and commercial accent and display lighting

Housing Construction

20 ga. steel painted matte black
Extruded aluminum heatsink
Formed aperture plate with 5/8" lip (GB-standard)
Cast aluminum plaster frame with perforated face (for trimless option)
Integral adjustable locking mounting bars
Inherently protected

Reflector Trim Construction

Die-cast reflector
Pinhole trim features stamped faceplate and die-cast baffle
Pinhole shower trim features solite glass lens and silicone flange gasket

Optical

0-40° lockable tilt, 360° lockable rotation, and lockable aiming (ceiling thickness greater than 1" will affect max angle adjustment)
Beam Spreads: Spot, 15°; Flood, 25°; Wide Flood, 36°;
Very Wide Flood, 55°
Optional **SOL** - solite beam softening lens (up to ~5° widening of beam)

LED

Color Temp Options: 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. or 90+ typ.
Class A* 3000K (high gamut) available
R9 Values: 11 (83 CRI), 55 (92 CRI)
Binning: 3 MacAdam (SDCM)
Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs
* Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.

Electrical

Wattage: 8W, 12W, 17W
Electronic constant current LED driver, 120/277VAC input
This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.
Emergency option available through circuiting/inverter only

Drivers

LE/TE - Leading Edge (Triac, Forward Phase) or Trailing Edge (ELV, Reverse Phase)
0-10V and Lutron systems also available
See pages 9-10 for more dimming information

Finish (Trim)

Powder coat paint

Mounting

26" Hanger bars included. Side brackets allow for rigid conduit pipe mounting along with additional 1/2" adjustment of housing vertical position
Optional **HB49** - hanger bars from min 29" to max 49" available
Trimmed Fixture:
For use in grid or sheetrock ceilings, 5/8" - 2" standard
Trimless Fixture (not available with Shower trim):
For use in sheetrock ceilings, max ceiling thickness 5/8"
For sheetrock ceilings beyond 5/8" consult factory
Millwork Fixture:
Millwork extension collars are based on ceiling material specifications and thickness. Provides flush trim appearance level with ceiling material. Max thickness 2"
Note: Ceiling thickness greater than 1" will affect max angle adjustment.

Certifications

CSA damp as tested to UL 1598 standards
Wet location (SHW trim) - for indoor, high humidity/moisture from below applications only
IC/AT rated
JA8 Title 24 compliant (see ordering page for options that apply)

Warranty

5 year limited warranty

Weight

Housing and trim - 7 lbs.



Solace

3" Shallow Square Adjustables




PROJECT:

TYPE:


Product Details

Solace Round Adjustables

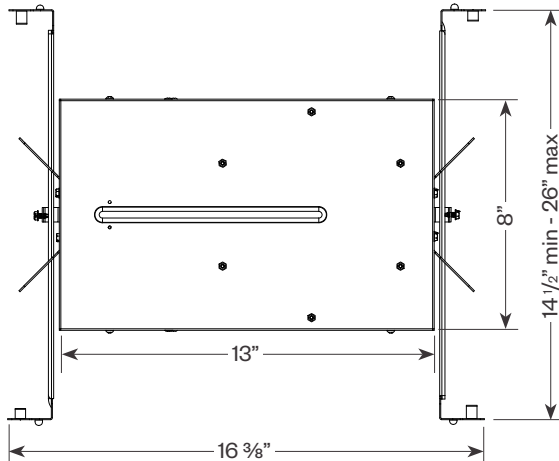


Plaster Frame Installation Detail (for trimless fixture only)

1. Reflector Trim
2. Aperture Plate
3. Ceiling 5/8"
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (by others)
6. 6-32 Type F Thread Cutting Screw




Millwork Detail

1. Reflector Trim
2. Millwork Ring
3. Aperture Plate
4. Wood Ceiling 2" Max
5. Extension collar (see ordering information for ceiling thicknesses)
6. 1/16" required for trim to be flush with ceiling




Round Adjustable

Trimmed

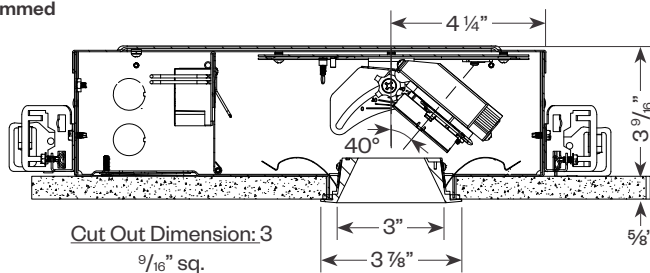


Trimless & Millwork

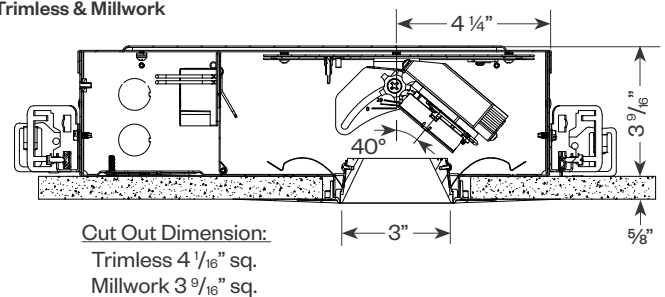


Round Pinhole Adjustable

Trimmed

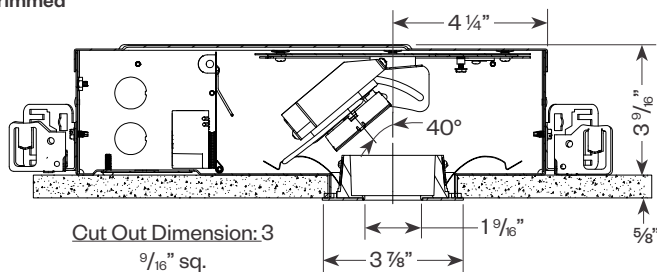


Trimless & Millwork

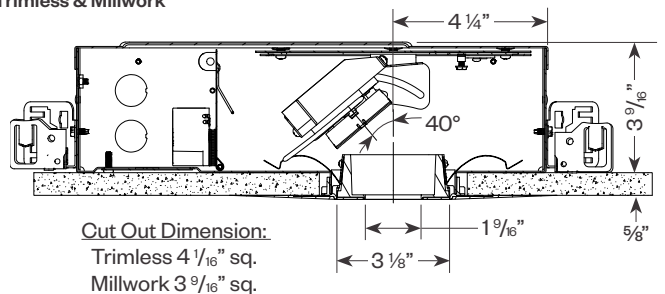

Round Pinhole Adjustable Shower

Trimmed

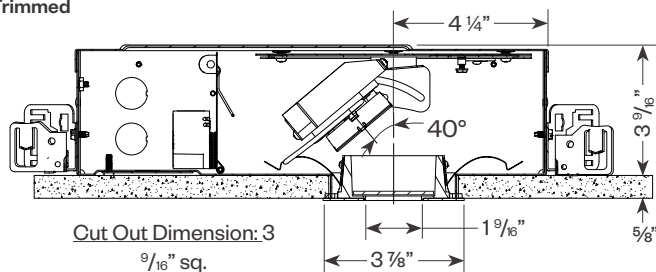

PROJECT:

TYPE:

Solace Round Adjustables Performance Breakdown *(without Solite lens)*

Wattage	Color Temp.	SP (15°)		FL (25°)		WF (36°)		VWF (55°)		Pinhole Spot (15°)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
8W	27	782	93	823	98	754	90	809	96	400	48
	30	798	95	840	100	769	92	826	98	409	49
	35	814	97	856	102	784	93	842	100	417	50
	40	838	100	881	105	807	96	867	103	429	51
	279	670	80	705	84	646	77	694	83	343	41
	309	694	83	730	87	669	80	718	86	355	42
	359	718	85	756	90	692	82	743	88	368	44
	409	718	85	756	90	692	82	743	88	368	44
	3CLA	558	66	588	70	538	64	578	69	286	34
12W	27	1150	92	1211	97	1109	89	1191	95	589	47
	30	1174	94	1236	99	1132	91	1215	97	601	48
	35	1197	96	1260	101	1154	92	1240	99	613	49
	40	1233	99	1297	104	1188	95	1276	102	631	51
	279	986	79	1038	83	951	76	1021	82	505	40
	309	1021	82	1075	86	985	79	1057	85	523	42
	359	1057	85	1112	89	1019	81	1094	87	541	43
	409	1057	85	1112	89	1019	81	1094	87	541	43
	3CLA	822	66	865	69	792	63	851	68	421	34
17W	27	1475	88	1552	92	1422	85	1527	91	755	45
	30	1505	90	1584	94	1451	86	1558	93	771	46
	35	1535	91	1616	96	1480	88	1589	95	786	47
	40	1580	94	1663	99	1524	91	1636	97	809	48
	279	1264	75	1331	79	1219	72	1309	78	648	39
	309	1309	78	1378	82	1262	75	1355	81	671	40
	359	1355	81	1426	85	1306	78	1402	84	694	41
	409	1355	81	1426	85	1306	78	1402	84	694	41
	3CLA	1054	63	1109	66	1016	60	1091	65	540	32

PROJECT:

TYPE:

Performance Data - Square Adjustable (SOL-SA with 0° Tilt Angle)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0

Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.70


17W LED, 3000K-83, 0° Tile Angle

Spot (SP) Distribution, 15°
LTL # 13663493.15
Lumens: 1505; lm/W: 89.5




Candelas at Nadir	
Deg	Candela
0	8821
5	6819
15	1533
25	643
35	119
45	20

Flood (FL) Distribution, 25°
LTL # 13663493.16
Lumens: 1584; lm/W: 93.9




Candelas at Nadir	
Deg	Candela
0	7218
5	6417
15	2744
25	370
35	50
45	10

Wide Flood (WF) Distribution, 36°
LTL # 13663493.17
Lumens: 1451; lm/W: 86.3



Candelas at Nadir	
Deg	Candela
0	3734
5	3518
15	2261
25	776
35	120
45	18

Very Wide Flood (VWF) Distribution, 55°
LTL # 13663493.18
Lumens: 1558; lm/W: 92.8



Candelas at Nadir	
Deg	Candela
0	2215
5	2163
15	1831
25	1325
35	70
45	16

Application Data - Square Adjustable (SOL-SA with 0° Tilt Angle)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Spot	5.0'	353	1.3	1.3
	7.5'	157	2.0	2.0
	10.0'	89	2.8	2.8
	12.5'	57	3.4	3.4

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Flood	5.0'	289	2.1	2.1
	7.5'	129	3.2	3.2
	10.0'	73	4.3	4.3
	12.5'	47	5.3	5.3

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Wide Flood	5.0'	150	2.9	2.9
	7.5'	67	4.4	4.4
	10.0'	38	5.8	5.8
	12.5'	24	7.1	7.3

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Very Wide Flood	5.0'	89	4.3	4.3
	7.5'	40	6.4	6.6
	10.0'	23	8.6	8.8
	12.5'	15	10.9	11.0

PROJECT:

TYPE:

Performance Data - Square Adjustable (SOL-SA with approx. 20° Tilt Angle)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0

Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.70


17W LED, 3000K-83, 0° Tile Angle

Spot (SP) Distribution, 15°
LTL # 13663493.05
Lumens: 1246; lm/W: 73.8




Candelas at Nadir	
Deg	Candela
0	746
5	1263
15	4268
25	8205
35	1828
45	74

Flood (FL) Distribution, 25°
LTL # 13663493.06
Lumens: 1419; lm/W: 84.2




Candelas at Nadir	
Deg	Candela
0	626
5	1848
15	5352
25	6864
35	3341
45	278

Wide Flood (WF) Distribution, 36°
LTL # 13663493.07
Lumens: 1279; lm/W: 75.9



Candelas at Nadir	
Deg	Candela
0	1034
5	1817
15	3279
25	3603
35	2418
45	385

Very Wide Flood (VWF) Distribution, 55°
LTL # 13663493.08
Lumens: 1275; lm/W: 75.9



Candelas at Nadir	
Deg	Candela
0	1376
5	1745
15	2108
25	2149
35	1846
45	428

Application Data - Square Adjustable (SOL-SA with approx. 20° Tilt Angle)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).





23° Aiming Angle
Horizontal
Footcandles

	D	FC	L	W	CB
5.0'	263	1.5	1.4	2.0	
7.5'	117	2.6	1.9	3.0	
10.0'	66	3.3	2.6	4.0	
12.5'	42	4.0	3.3	5.0	



**23° Aiming Angle
Horizontal
Footcandles**

	D	FC	L	W	CB
5.0'	224	2.4	2.2	2.0	
7.5'	99	3.6	3.3	3.0	
10.0'	56	4.8	4.5	4.0	
12.5'	36	6.0	5.6	5.0	



23°

23° Aiming Angle
Horizontal
Footcandles

	D	FC	L	W	OB
Wide Flood	5.0'	117	3.1	3.0	2.0
	7.5'	53	4.7	4.5	2.0
	10.0'	30	6.2	5.9	3.0
	12.5'	20	7.8	7.4	4.0



23° Aiming Angle

Horizontal Footcandles

	D	FC	L	W	OB
Very Wide Flood	5.0'	76	3.9	4.3	1.0
	7.5'	34	5.9	6.5	2.0
	10.0'	19	7.9	8.7	2.0
	12.5'	13	9.9	10.8	3.0

		23° Aiming Angle Vertical Footcandles			
Spot	D	FC	L	W	CB
	3.0'	55	4.4	2.4	5.5
	4.0'	34	5.7	2.9	7.5
	5.0'	23	7.0	3.3	9.5
	6.0'	17	8.4	3.7	11.5

		23° Aiming Angle Vertical Footcandles			
Flood	D	FC	L	W	CB
	3.0'	63	4.5	3.0	5.5
	4.0'	38	5.8	3.7	6.5
	5.0'	25	7.2	4.5	8.5
	6.0'	18	8.9	5.4	10.5

23°

23° Aiming Angle
Vertical
Footcandles

	D	FC	L	W	OB
Wide Flood	3.0'	44	4.1	3.3	4.5
	4.0'	26	5.3	4.2	5.5
	5.0'	18	6.4	5.2	7.5
	6.0'	12	7.8	6.2	8.5

		23° Aiming Angle Vertical Footcandles			
Very Wide Flood	D	FC	L	W	OB
	3.0'	35	3.6	3.8	4.5
	4.0'	22	4.3	4.8	5.5
	5.0'	14	5.4	6.2	6.5
	6.0'	10	6.6	7.5	7.5

PROJECT:

TYPE:

Performance Data - Square Pinhole Downlight (SOL-RPA)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)

Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0


Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.70

17W LED, 3000K-83

0° Tilt Angle

Spot (SP) Distribution, 15°
LTL # 13663493.20A
Lumens: 771; lm/W: 45.9




Candelas at Nadir

Deg	Candela
0	6831
5	5147
15	1008
25	44
35	10
45	5

20° (approx.) Tilt Angle

Spot (SP) Distribution, 15°
LTL # 13663493.10
Lumens: 571; lm/W: 34

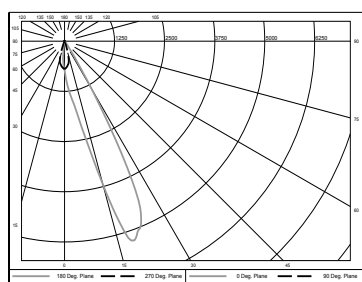

Candelas at Nadir

Deg	Candela
0	702
5	1233
15	3684
25	4376
35	147
45	10

Application Data - Square Pinhole Downlight (SOL-RPA)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



0° Aiming Angle
Horizontal
Footcandles

Spot	D	FC	L	W
	5.0'	273	1.3	1.3
	7.5'	122	1.9	1.9
	10.0'	68	2.8	2.8
	12.5'	44	3.4	3.4

23° Aiming Angle
Horizontal
Footcandles

Spot	D	FC	L	W	CB
	5.0'	162	1.6	1.4	2.0
	7.5'	72	2.5	1.9	3.0
	10.0'	41	3.3	2.9	3.0
	12.5'	28	3.9	3.4	4.0

23° Aiming Angle
Vertical
Footcandles

Spot	D	FC	L	W	CB
	3.0'	28	4.2	2.3	6.5
	4.0'	17	5.3	2.8	8.5
	5.0'	12	6.6	3.4	10.5
	6.0'	8	8.3	3.9	12.5

PROJECT:

TYPE:

Dimming Compatibility

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

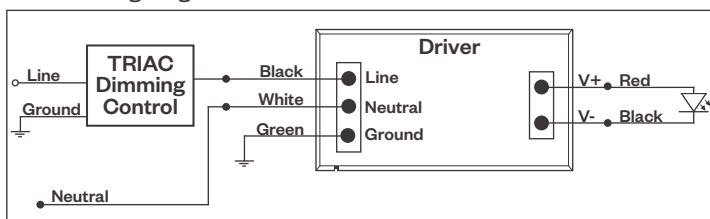

Compatible Dimmers†:	
Wall Box (TRIAC 120VAC)	Central System
Lutron "Diva"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	


ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

ELV Wiring Diagram

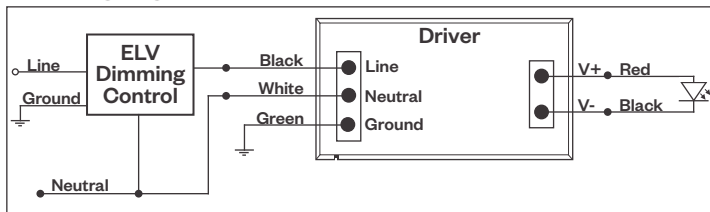

Compatible Dimmers†:		
Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

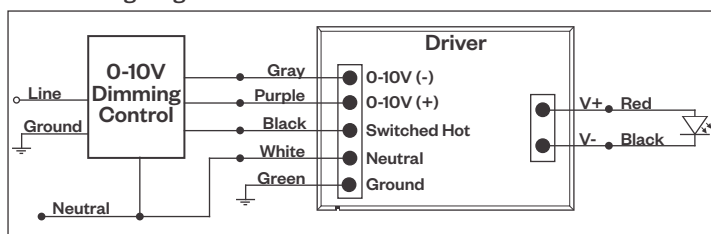

Compatible Dimmers*:

Wall Box

Lutron "Diva" - DVSTV | Leviton Renoir II 0-10V

Central System

Lutron Grafik Eye with GRX-TVI Interface


LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

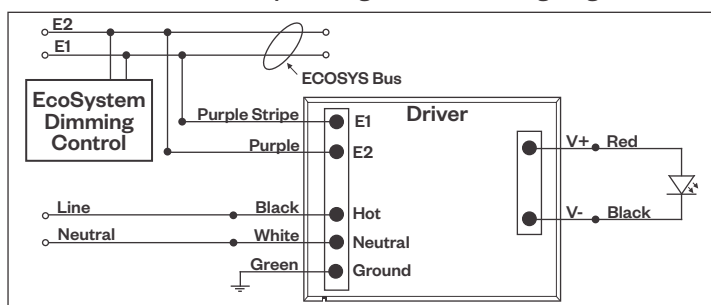

Compatible Dimmers*:

Lutron ECO System

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energj Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.