

**WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.**

**TO REMOVE TRIM FROM CEILING:**

**TIP:** WEAR PROTECTIVE GLOVES.

**1. PULL DOWN ON THE TRIM.**



**TIP:** FOR ADJUSTABLE FIXTURE; ADJUST TILT TO 0°. USE YOUR THUMB AGAINST THE CEILING FOR LEVERAGE. TWIST TRIM SLIGHTLY LEFT AND RIGHT THEN APPLY DOWNWARD FORCE.

**2. USE CAUTION. TORSION SPRING UNDER TENSION.**


**TIP:** WHEN TORSION SPRINGS BECOME VISIBLE, WRAP YOUR PALM AROUND THE HEATSINK THEN PULL TRIM DOWN.

**3. DISCONNECT WIRE HARNESS.**

**TIP:** DO NOT HANG TRIM BY THE WIRE HARNESS.

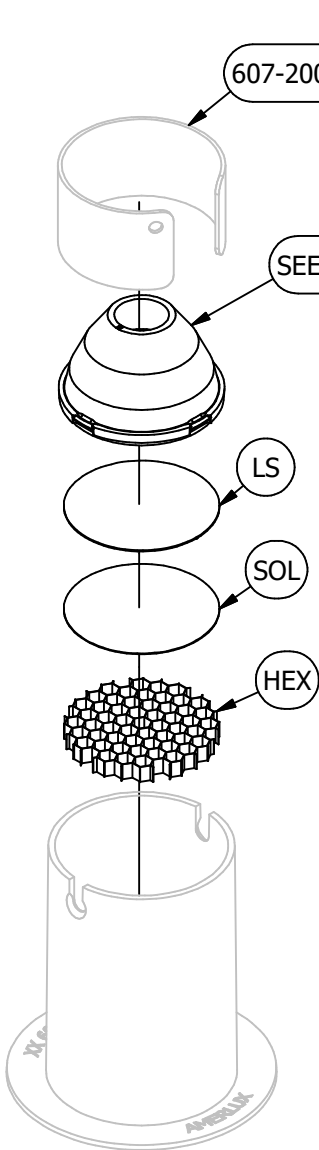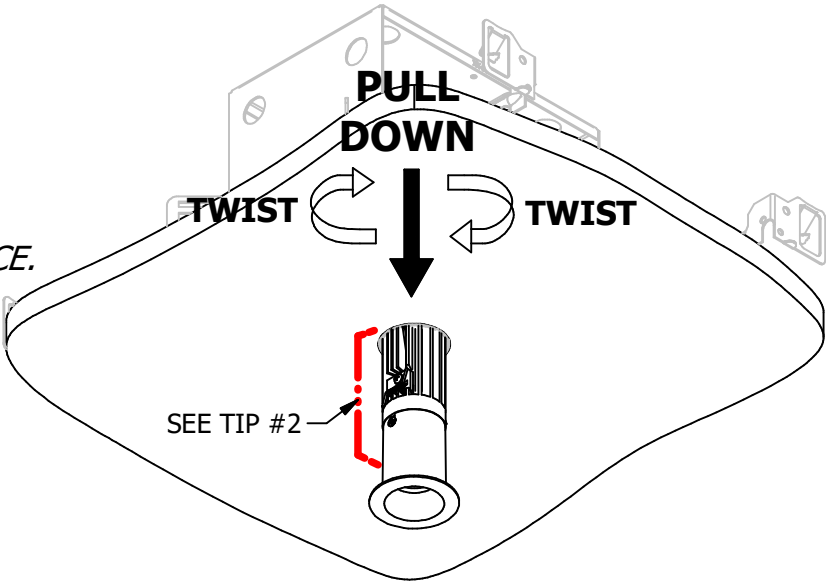


**FIN-RD/SD**

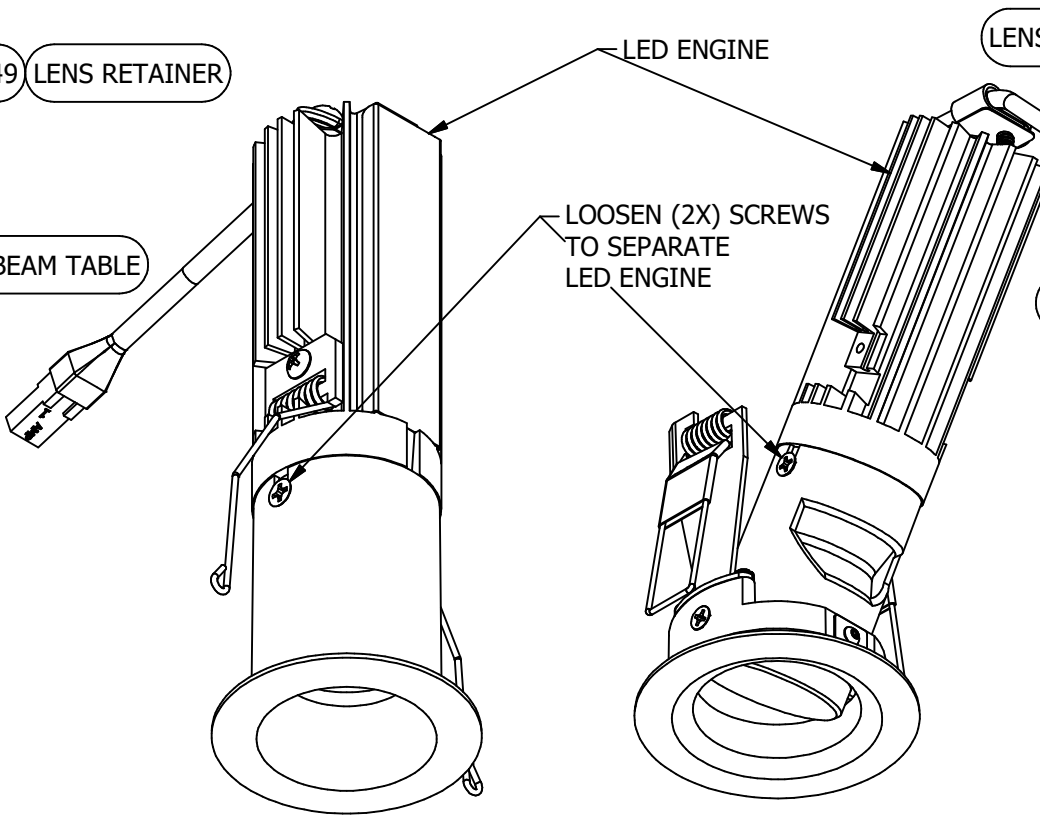



| BEAM SPREAD OPTION |           |
|--------------------|-----------|
| BEAM               | LENS P/N  |
| SP                 | 665-10019 |
| FL                 | 665-10021 |
| WF                 | 665-10022 |
| VWF                | 665-10023 |

| ACCESSORY OPTION |              |
|------------------|--------------|
| ACCESSORY        | P/N          |
| LS (60 x 10)     | 665-0044-05  |
| SOL              | 665-10016-01 |
| HEX              | 639-10042    |

ALL ACCESSORY; Ø1.079" ± .010"

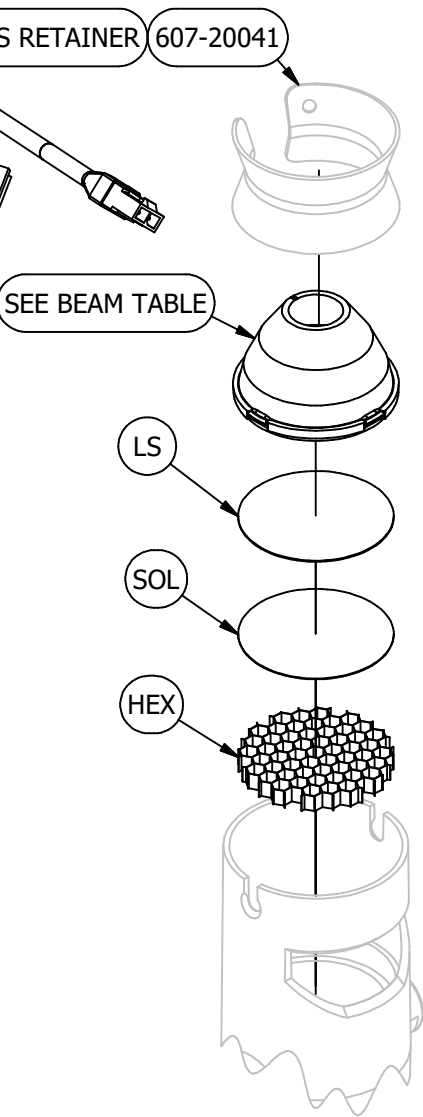

**FIN-RA/SA**

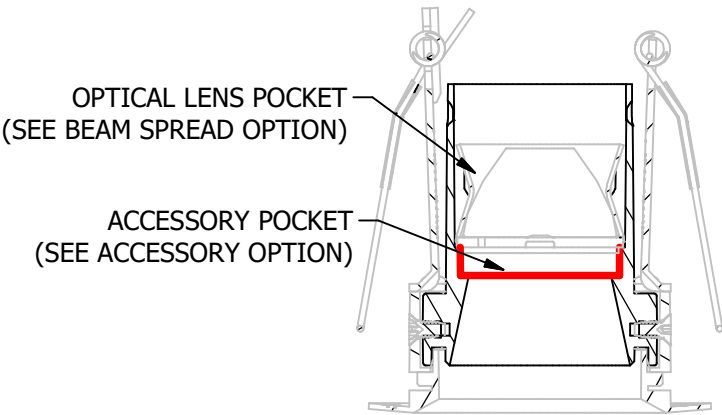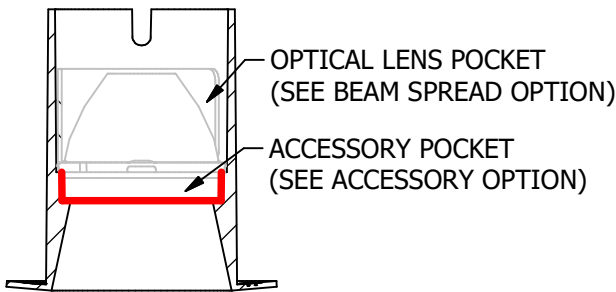

**NOTES:**

1. ACCESSORY POCKET ACCEPTS ALL THREE ACCESSORIES.
2. INSTALL OPTICAL FILM NON TEXTURE SURFACE (SHINY SIDE) FACING DOWN TOWARD THE FLOOR.
3. OPENING IN LENS RETAINER RING SHALL ALIGNED WITH HEATSINK WIRE WAY COVER.
4. REFER TO AD-10151 TO IDENTIFY OPTICAL LENS AND OPTICAL FILM.