

INSTRUCTION SHEET



Fino Installation Sheet

689-0407

PAGE 1 OF 3


WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

Pre-Installation Note:


- Reflector boxed separately from Housing
- Mounting Hardware supplied by other
- Fixture designed for $\frac{5}{8}$ " Gypsum Board Only

1. Cut slot in wall for Fixture.

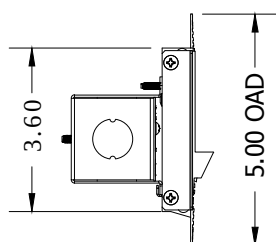


Cut slot in wall no bigger than
3 3/4" X length of fixture (for ind).
3 3/4" X length + 1" (for Runs)
(Maintain level cut)


2. Remove Dust Cover (DO NOT DISCARD)

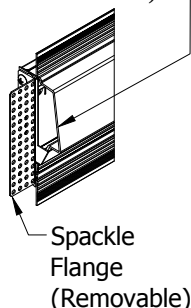


2a. Adjust ballast box to avoid interference with Studs (If necessary)

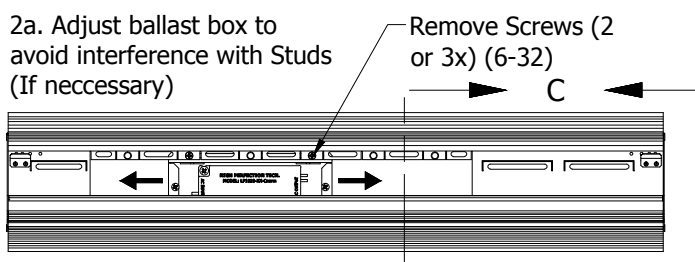

Locate tabs on back of mounting tray. bend out appropriate tabs to catch ballast box. (Bend tabs back tight once installed)

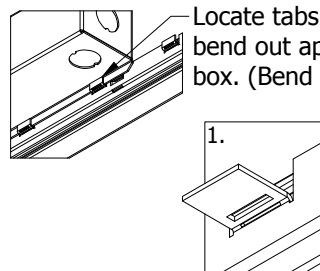


1. Bend tab out, insert driver box.



2. Bend tab back around driver box.


3. Connect power to Ballast.

3a. Chain power to other fixtures in run if needed.

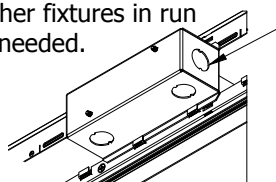

DETAIL B


4. Mount fixture to studs using allotted screw slots.

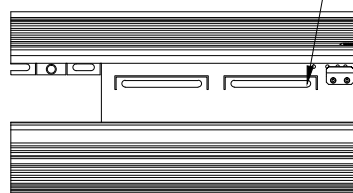

DETAIL C

Note: Installing contractors responsibility to install straight and true


5. Re-Install Dust Cover

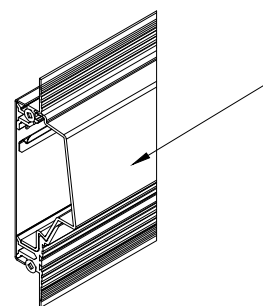


WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.


5a. Mud fixture top, bottom and ends.

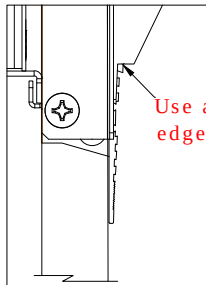

Use as straight
edge for mudding

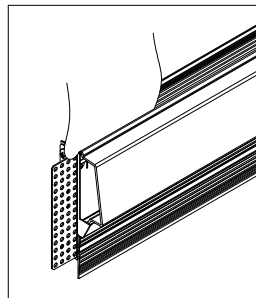

Leave clean
sharp edge

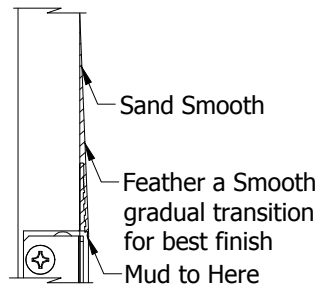


Sand Smooth

Feather a Smooth
gradual transition
for best finish


Mud to Here

5b. Remove Dust Cover
(Only once wall is painted,
and edges are clean)




Dust
Cover

6. Remove Ballast Box Cover.
(6-32 pan head)

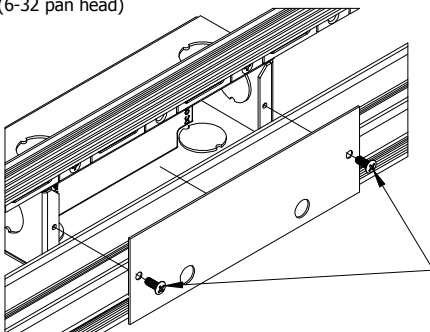



7. Run wires from reflector through
ballast cover plate to ballast.
Connect.

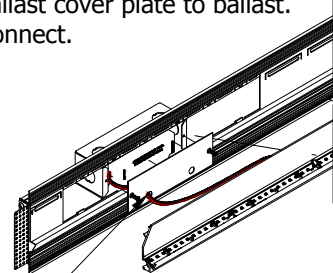


1. Run wires through ballast box cover.
2. Connect reflector to ballast.
3. Replace cover.

8. Place Reflector into Housing.
Snap into place

Rotate then push to snap in.

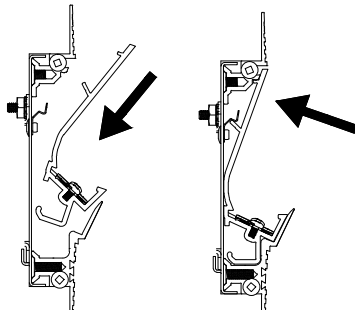


9. Place Lens into fixtre.

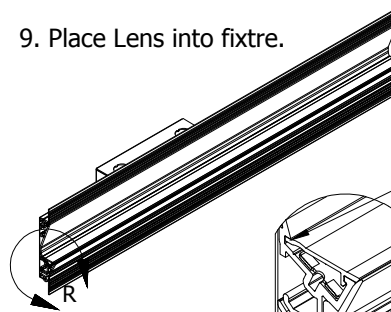

Place lens in at angle

Snap into place



DETAIL R

WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

For Runs

A. Cut hole in wall 1" longer than total run length, to allow room to install.

B. Mount first fixture in run following steps 1-4 on page 1

C. To mount consecutive fixtures position ballast box and connect. Then locate pins (Shown here) and slide them into the other fixture.

D. Secure Catch and Latch, Unless it is located on a Stud. In this case Remove.
Continue from step 3 on Page 1.

E. Make sure to Fill / Mud 1" gap in end of run when Installation of run is complete.

