

APQ200R Series

Extruded Pole with Anchor Plate



PROJECT:

TYPE:

Features

The APQ Family includes a broad selection of decorative aluminum poles with a typical lead time of just (6) weeks. The APQ poles are the right choice for projects that require a quick fulfillment to the site and don't need customization of the poles.

Product Overview

Type: Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height: 8', 10', 12', 14', 16'
Shaft Size: 4" OD, 5" OD



Certifications



Fixture Summary

Construction:

- 8" square cast aluminum base flange
- Extruded aluminum shaft is circumferentially welded to the structural base
- A 2x4 flat handhole with re-inforced frame
- Ground lug included inside base

Materials:

- Base - Cast aluminum (A356)
- Shaft - Extruded aluminum (A6061)
- Tenon - Cast aluminum (A356)
- Anchor Bolts - Hot dipped galvanized steel

Finish:

Premium quality thermoset polyester powdercoat for durable finish.

Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Two-piece cover placed at base of pole for better aesthetics

APQ200R Series

Extruded Pole with Anchor Plate



PROJECT:

TYPE:

Ordering Information - Pole

1	2	3	4
1 Model	2 Pole Height	3 Finish	4 Options
APQ203R 4" O.D. fluted pole, 0.125 wall	08 8'-0"	BLK satin black	(3" OD x 3" tall tenon is standard)
APQ204R 4" O.D. smooth pole, 0.125 wall	10 10'-0"	CLB classic bronze	LT less tenon
APQ205R 5" O.D. fluted pole, 0.156 wall	12 12'-0"	GRN green	GFCI-TOP ground fault circuit protected outlet, placed 6" from the top of pole
APQ206R 5" O.D. smooth pole, 0.125 wall	14 14'-0"	TBK textured black	
	16 16'-0"		

Ordering Information - Anchor Bolt *(ordered separately, can be pre-shipped upon request)*

APQ20XR-555-0004

1
1 Model
APQ20XR-555-0004 1/2" x 18" anchor bolts (4 included)

Ordering Information - Accessories *(ordered separately)*

1	2
1 Model	2 Finish
BA18-FRC4 18" banner arm, 4" OD shaft	BLK satin black
BA18-FRC5 18" banner arm, 5" OD shaft	CLB classic bronze
BA24-FRC4 24" banner arm, 4" OD shaft	GRN green
BA24-FRC5 24" banner arm, 5" OD shaft	TBK textured black
2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft	
2BA18-FRC5-180 double sided 18" banner arms, 5" OD shaft	
2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft	
2BA24-FRC5-180 double sided 24" banner arms, 5" OD shaft	
FPH-4 flag pole holder for 4" non-tapered poles	
FPH-5 flag pole holder for 5" non-tapered poles	
BC4-9 base cover for 4" shaft	
BC5-9 base cover for 5" shaft	

APQ200R Series


Extruded Pole with Anchor Plate



PROJECT:

TYPE:

Product Details

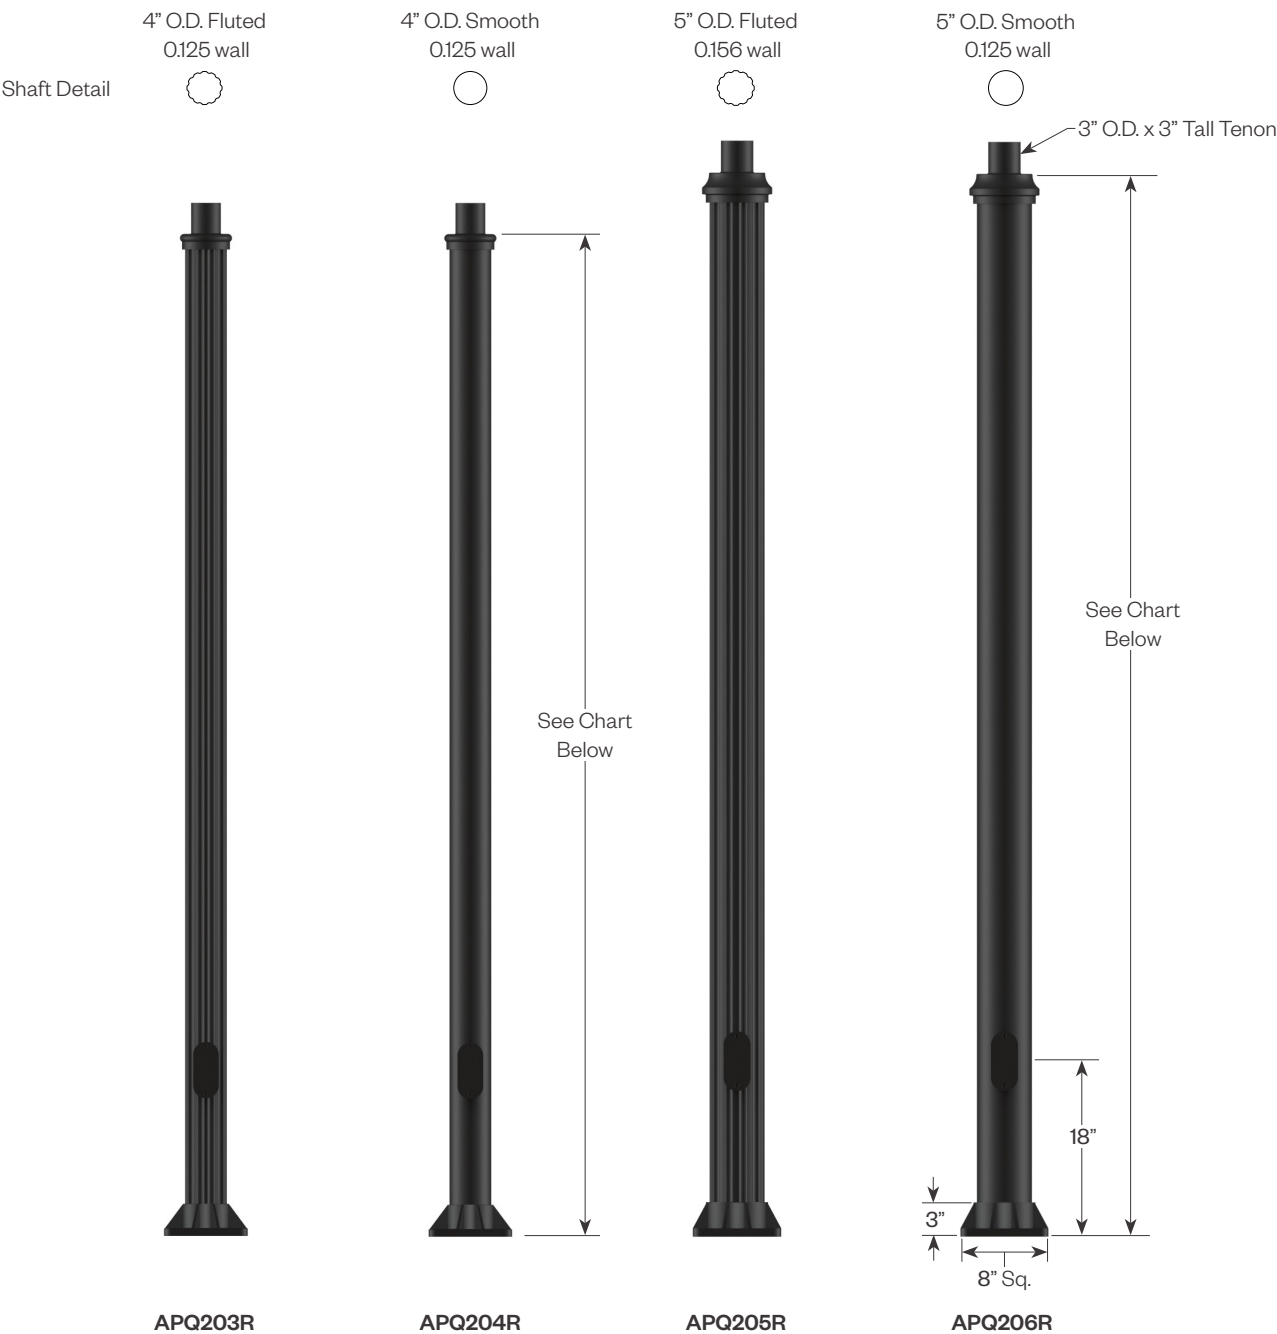

APQ203R-xx	APQ204R-xx	APQ205R-xx	APQ206R-xx	Actual Height
APQ203R-08	APQ204R-08	APQ205R-08	APQ206R-08	8'-0"
APQ203R-10	APQ204R-10	APQ205R-10	APQ206R-10	10'-0"
APQ203R-12	APQ204R-12	APQ205R-12	APQ206R-12	12'-0"
APQ203R-14	APQ204R-14	APQ205R-14	APQ206R-14	14'-0"
APQ203R-16	APQ204R-16	APQ205R-16	APQ206R-16	16'-0"

APQ200R Series


Extruded Pole with Anchor Plate



PROJECT:

TYPE:

Product Details (continued)

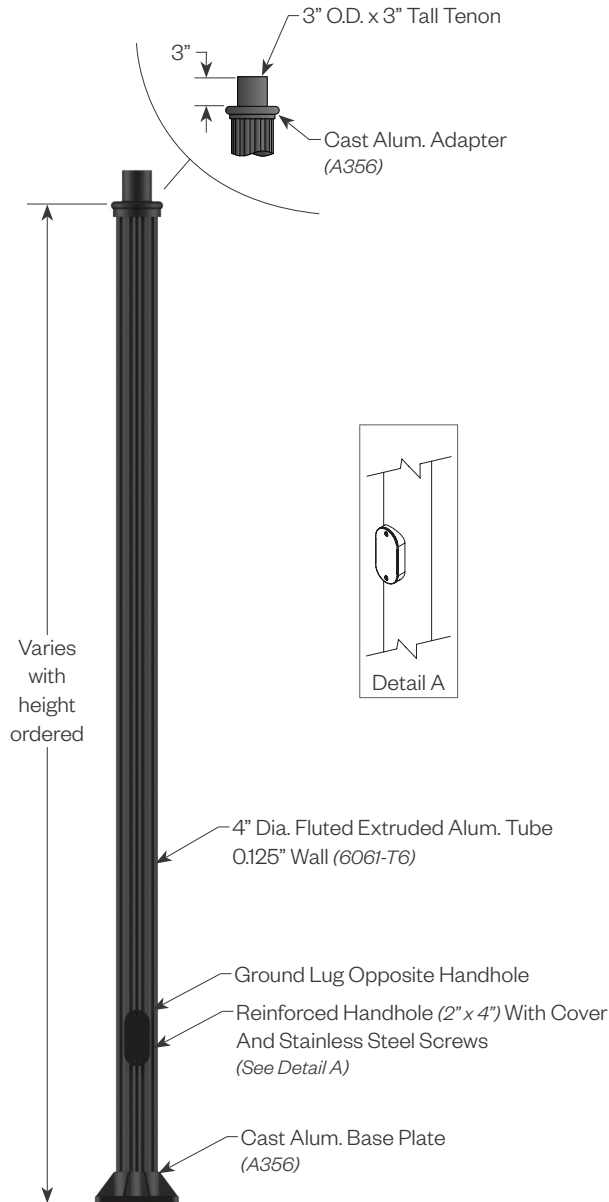

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 4 stock finishes or hundreds of special order colors including custom matching for existing projects (*additional charges apply*).

BLK - Satin Black

GRN - Green

CLB - Classic Bronze

TBK - Textured Black

Options/Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4" OD shaft) or **FRC5** (5" OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4 or FPH-5

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD or 5" OD non-tapered pole.



GFCI - Top


Covered ground fault circuit protected duplex outlet. Can be placed near top of pole. Wet while in use rated.




Base Covers

BC4-9 - 9" Square 2pc base cover for 4" shaft.

BC5-9 - 9" Square 2pc base cover for 5" shaft.



GFCI Orientation Guide





Notes: 1. GFCI placed at 0° unless otherwise specified.

2. Orientation of additional accessories must be specified when ordering.

As viewed from above.

Anchor Details



(4) 1/2" Galvanized Steel L-Type Anchor Bolts

(8) 1/2" Galvanized Steel Hex Nuts

(8) Galvanized Steel Flat Washers

Anchor bolts and templates can be requested prior to product shipment.



Delta Intelligent Building Technologies

178 Bauer Drive, Oakland, NJ 07436 • P: 973-882-5010 F: 973-882-2605 • amerlux.com
Amerlux reserves the right to change details that do not affect overall function and performance.

LIT-E0187 • 08/08/25 • Page 4 of 4