5” Direct Burial Series

PROJECT:	TYPE:

Features

Light poles with embedded base mounting. Provides for easier installation, cost and time savings. They eliminate the need for expensive anchor base footings and bases. Ideal for parking lots, streets, roadways and more. Accepts a wide variety of Amerlux post top luminaires.

APxx5DB

Product Overview

Type:	Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height:	8’, 10’, 12’, 14’, 16’ *(overall height above finished grade)*
Shaft Size:	5” to 3” OD, 5” OD

Certifications

POWDER COATED TOUGH™

Fixture Summary

Choice of Extruded Shafts:
- 5” to 3” smooth tapered, 0.125 wall
- 5” OD fluted *(12 flutes)*, 0.125 wall
- 5” OD smooth round, 0.125 wall

A 2”x4” handhole with curved lap style aluminum door and two stainless steel self-tapping screws are standard. A grounding provision incorporating a tapped 1/4” 20NC hole is provided opposite the handhole.

Materials:
Shaft - Extruded aluminum *(6063-T6)*
- Tapered aluminum *(6063-T6)*

Finish:
Premium quality thermoset polyester powdercoat for a durable finish.

Options/Accessories:
- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Two-piece cover placed at pole-ground interface for better aesthetics

5” Direct Burial Series

amerlux

PROJECT:	TYPE:

Ordering Information - Pole

_____ . _____ . _____ . _____

1 2 3 4

1	Model
	APRT5DB 5” to 3” O.D. smooth tapered pole, 0.125 wall
	APFS5DB 5” O.D. fluted pole, 0.125 wall
	APRS5DB 5” O.D. smooth pole, 0.125 wall

2	Pole Height
	08 8’-O”
	10 10’-O”
	12 12’-O”
	14 14’-O”
	16 16’-O”

3	Finsh
	BLK satin black
	CLB classic bronze
	GBZ gloss textured bronze
	GRN green
	GTB gloss textured black
	TBK textured black
	TGR gloss textured green
	CSTM custom, consult factory

4	Options
	GFCI-TOP* ground fault circuit protected outlet, placed 6” from the top of pole
	GFCI-BTM ground fault circuit protected outlet, placed 6” above the decorative base at the bottom of pole
	LT* less tenon
	**** Not available for use with 4” to 3” tapered pole.***

Ordering Information - Accessories *(ordered separately)*

_____ . _____

1 2

1	Model *(all accessories (except 5-COV) below are for non-tapered shafts only)*
	BA18-FRC5 18” banner arm, 5” OD shaft
	BA24-FRC5 24” banner arm, 5” OD shaft
	2BA18-FRC5-180 double sided 18” banner arms, 5” OD shaft
	2BA24-FRC5-180 double sided 24” banner arms, 5” OD shaft
	FPH-5 flag pole holder for 5” non-tapered poles
	5-COV two piece cover

2	Finsh
	BLK satin black
	CLB classic bronze
	GBZ gloss textured bronze
	GRN green
	GTB gloss textured black
	TBK textured black
	TGR gloss textured green
	CSTM custom, consult factory

5” Direct Burial Series

PROJECT:	TYPE:

Product Details

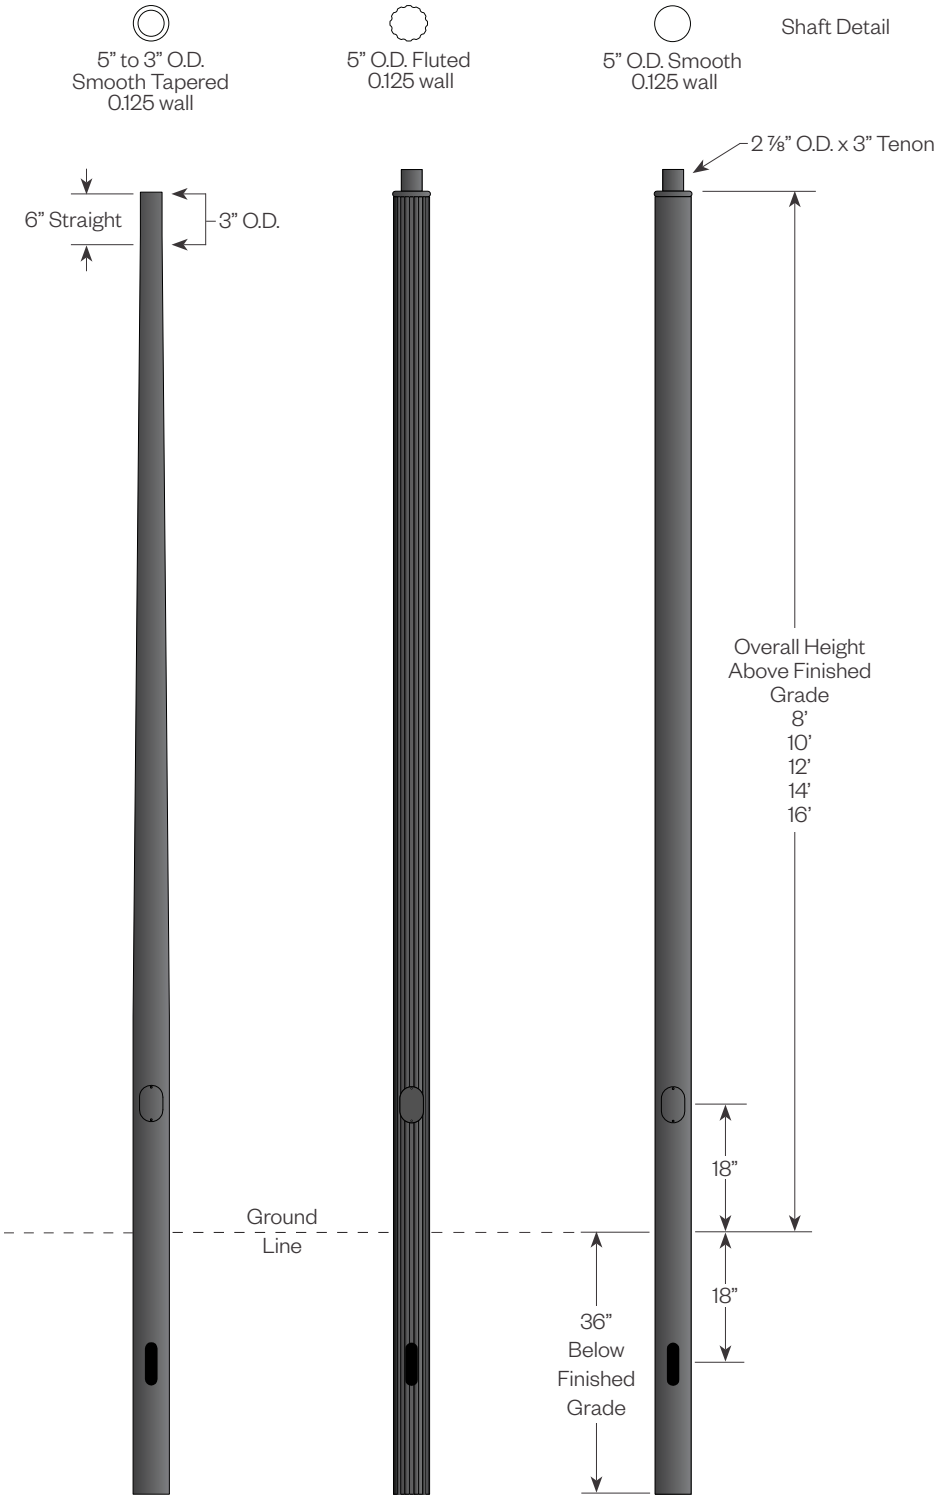

APRT5DB.XX **APFS5DB.XX** **APRS5DB.XX**

5” Direct Burial Series

amerlux

PROJECT:	TYPE:

Product Details *(continued)*

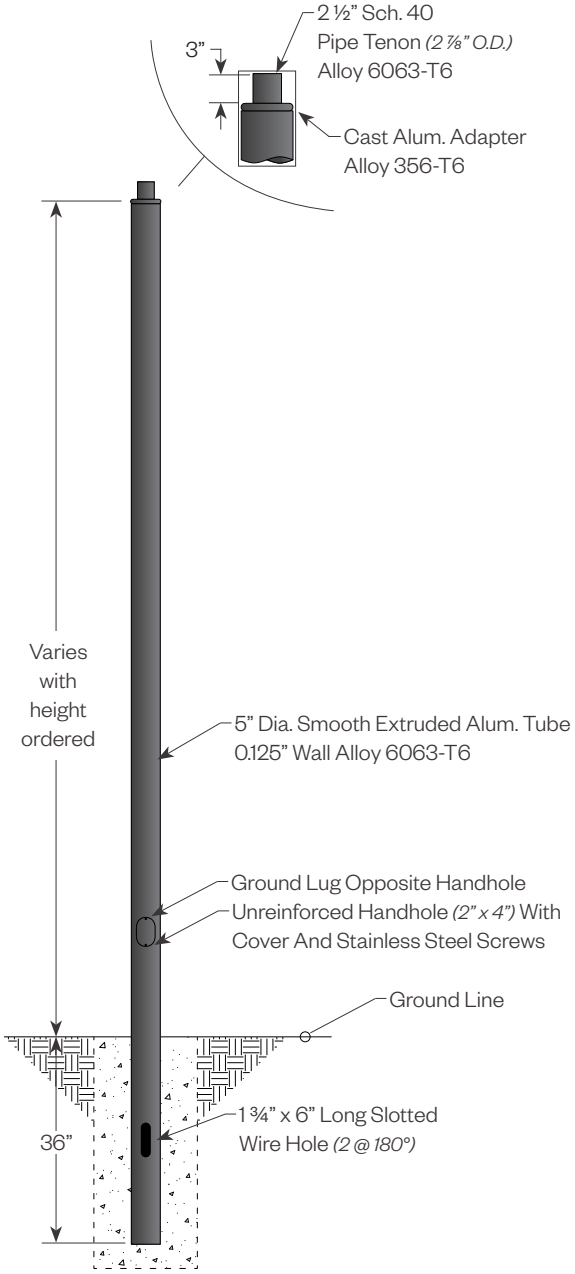

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects *(additional charges apply)*.

BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green

Options/Accessories

Banner Arms
Single or double sided field rotatable banner arms.
BA18 *(18”)* or **BA24** *(24”)* banner arms
FRC5 *(5”OD shaft)*
Add a *(2)* for a double arm.
Example: **2BA18-FRC5-180**
See ordering guide for configurations

FPH-5
Extruded aluminum holder for 1” OD flag poles.
Available for 5” OD non-tapered pole.



GFCI - Top/Bottom
Covered ground fault circuit protected duplex outlet. Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.



5 - Cover
Two piece cover is fabricated from stamped and formed aluminum.