

5" Direct Burial Series



PROJECT:

TYPE:

Features

Light poles with embedded base mounting. Provides for easier installation, cost and time savings. They eliminate the need for expensive anchor base footings and bases. Ideal for parking lots, streets, roadways and more. Accepts a wide variety of Amerlux post top luminaires.

Product Overview

Type: Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height: 8', 10', 12', 14', 16' (overall height above finished grade)
Shaft Size: 5" to 3" OD, 5" OD



APxx5DB

Certifications



Fixture Summary

Choice of Extruded Shafts:

- 5" to 3" smooth tapered, 0.125 wall
- 5" OD fluted (12 flutes), 0.125 wall
- 5" OD smooth round, 0.125 wall

A 2"x4" handhole with curved lap style aluminum door and two stainless steel self-tapping screws are standard. A grounding provision incorporating a tapped 1/4" 20NC hole is provided opposite the handhole.

Materials:

- Shaft - Extruded aluminum (6063-T6)
- Tapered aluminum (6063-T6)

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

Options/Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Two-piece cover placed at pole-ground interface for better aesthetics

5" Direct Burial Series



PROJECT:

TYPE:

Ordering Information - Pole

1	2	3	4
1 Model	2 Pole Height	3 Finish	4 Options
APRT5DB 5" to 3" O.D. smooth tapered pole, 0.125 wall	08 8'-0"	BLK satin black	GFCI-TOP ground fault circuit protected outlet, placed 6" from the top of pole
APFS5DB 5" O.D. fluted pole, 0.125 wall	10 10'-0"	CLB classic bronze	GFCI-BTM ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of pole
APRS5DB 5" O.D. smooth pole, 0.125 wall	12 12'-0"	GBZ gloss textured bronze	LT* less tenon
	14 14'-0"	GRN green	*Not available for use with 4" to 3" tapered pole.
	16 16'-0"	GTB gloss textured black	
		TBK textured black	
		TGR gloss textured green	
		CSTM custom, consult factory	

Ordering Information - Accessories (ordered separately)

1	2
1 Model (all accessories (except 5-COV) below are for non-tapered shafts only)	2 Finish
BA18-FRC5 18" banner arm, 5" OD shaft	BLK satin black
BA24-FRC5 24" banner arm, 5" OD shaft	CLB classic bronze
2BA18-FRC5-180 double sided 18" banner arms, 5" OD shaft	GBZ gloss textured bronze
2BA24-FRC5-180 double sided 24" banner arms, 5" OD shaft	GRN green
FPH-5 flag pole holder for 5" non-tapered poles	GTB gloss textured black
5-COV two piece cover	TBK textured black
	TGR gloss textured green
	CSTM custom, consult factory


5" Direct Burial Series



PROJECT:

TYPE:

Product Details

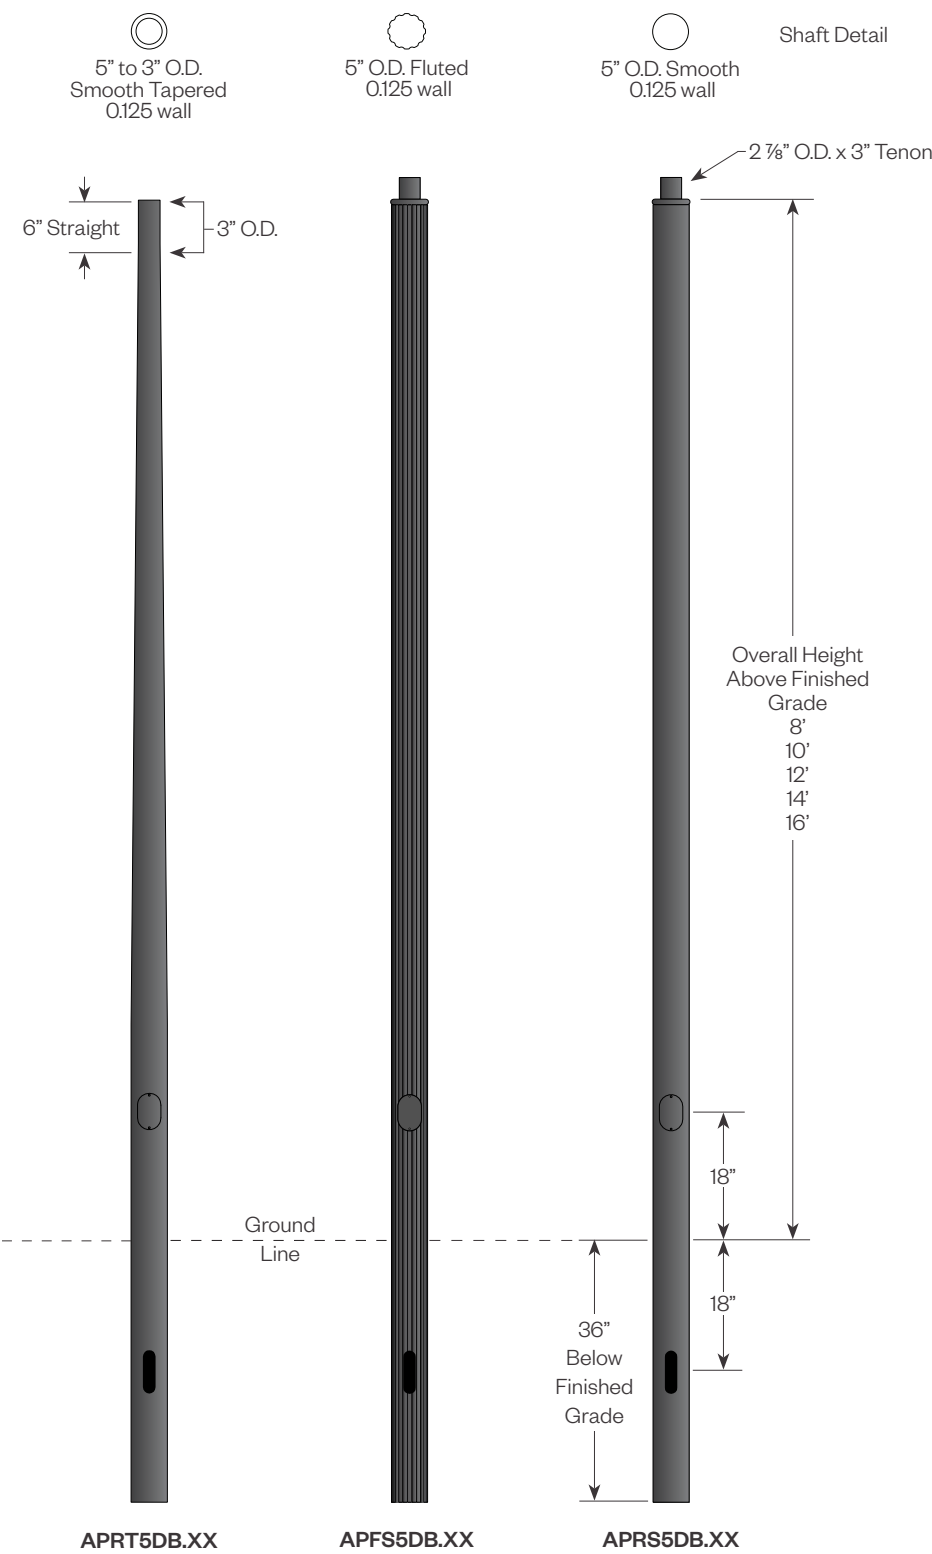


5" Direct Burial Series



PROJECT:

TYPE:

Product Details (continued)

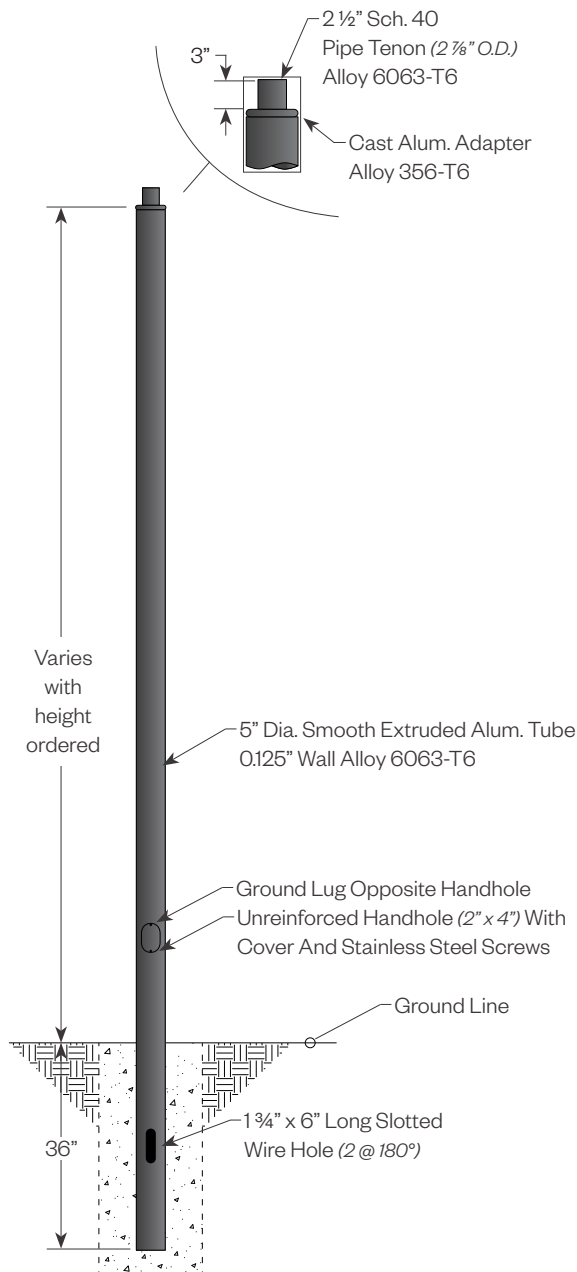

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (*additional charges apply*).

BLK - Satin Black

CLB - Classic Bronze

GBZ - Gloss Textured Bronze

GRN - Green

GTB - Gloss Textured Black

TBK - Textured Black

TGR - Gloss Textured Green

Options/Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC5 (5" OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC5-180**

See ordering guide for configurations



FPH-5


Extruded aluminum holder for 1" OD flag poles.

Available for 5" OD non-tapered pole.



GFCI - Top/Bottom

Covered ground fault circuit protected duplex outlet. Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.



5 - Cover

Two piece cover is fabricated from stamped and formed aluminum.