

Cylindrix® III

Semi-Recessed Multiples



PROJECT:

TYPE:

Features

Cylindrix® III Recessed LED, the best combination of optical and thermal performance, aesthetics and visual comfort in an recessed accent. Features a deeply recessed single LED light source for enhanced visual comfort and control, integrated heat sink and high performance interchangeable reflector optics (*for 15°/25°/40° beam spreads only*). A 10° beam spread is also available but not interchangeable with the other beam options. Available in 1, 2 or 3 light configurations.



Product Overview

Type: Semi-Recessed Multiple, Accent & Display
Wattage: 16W, 19W, 23W, 27W, 31W
Color Temp: 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. or 90+ typ.
Class A LEDs available
Dimming: TRIAC & ELV, 5% Dim, 120/277VAC
Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black, 120/277VAC
0-10V, 1% Dim, 120/277VAC
DALI, 1% Dim, 120/277VAC

Certifications



Fixture Summary

Fixture Type

# of Heads	New Construction	Remodeler	Trim	Trimless
1	Yes	No	Yes	No
2	Yes	No	Yes	No
3	Yes	No	Yes	No

See separate spec sheet for Recessed version.

Performance Data

Watts	Delivered Lumens	LPW	CBCP	Color Temp-CRI
16	1,700	106.3	6,921	3000K-83
19	2,018	119.3	8,332	3000K-83
23	2,440	106.1	9,934	3000K-83
27	2,880	106.7	11,726	3000K-83
31	3306	100.4	13,460	3000K-83

Data is based on 3000K-83 120V IES files available on website.

Data is "per head" and based on Flood Optic. See pg 6 for other beam spreads.

Cylindrix® III

Semi-Recessed Multiples



PROJECT:

TYPE:

Ordering Information - Frame

T							
1	2	3	4	5	6		
1	Model	2	Style	3	# of Heads	4	Voltage
	C3R/SR-NC-FRAME (new construction)		T trimmed		1		120
	C3R/SR-CP-FRAME (Chicago Plenum)				2		277
					3		
5	Driver (for non-dimming select LE/TE option)		6	Options/Accessories			
	LE/TE TRIAC/ELV dimming, 5% dim			EM* emergency battery pack, available on 2, 3 or 4 light - powers only 1 head of the total fixture			
	HILUME-H-ECO Lutron LDE1 Hi-lume® 1% dim			* If this option is selected, you must also select EM option in the Trim Ordering section.			
	Soft-On/Fade-to-Black			HB49 - hanger bars from min 29" to max 49"			
	0-10V 0-10V dimming, 1% dim			Note: 14 ½" - 25" hanger bars are included as standard.			
	DALI EldoLED, 1% dim			Choose HB49 option above for larger mounting spaces only.			

Ordering Information - Trim

120-277									
1	2	3	4	5	6	7	8	9	10
1	Model	2	Style	3	# of Heads	4	Wattage	5	Finish (for housing, head & trim)
	C3SR-NC-TRIM (new construction)		T - trimmed		1		16		WT white texture
	C3SR-CP-TRIM (Chicago Plenum)				2		19		BT black texture
					3		23		ST silver texture
							27		Other finishes, consult factory
							31		
6	Voltage	7	Beam Spread			8	Color Temp		
	120-277		1LT	2LT	3LT		83 CRI	90+ CRI	
			NSP*	NSP*	NSP*		27 2700K-83	279 2700K-90+	3CLA* 3000K Class A
			SP	SP	SP		30 3000K-83	309 3000K-90+	
			FL	FL	FL		35 3500K-83	359 3500K-90+	
			WF	WF	WF		40 4000K-83	409 4000K-90+	
			LS	LS	LS		* Not available for use with NSP beam spread		
			* Based on availability, lead times may vary, consult factory.						
9	Driver (for non-dimming select LE/TE option)		10	Options/Accessories					
	LE/TE TRIAC/ELV dimming, 5% dim			(standard front door accepts up to 1 accessory)					
	HILUME-H-ECO Lutron LDE1 Hi-lume® 1% dim			SN34 snoot 3/4" length, exterior finish matches fixture finish;					
	Soft-On/Fade-to-Black			accepts up to 2 accessories					
	0-10V 0-10V dimming; 1% dim			SN15 snoot 1-1/2" length, exterior finish matches fixture finish;					
	DALI EldoLED; 1% dim			accepts up to 2 accessories					
				HEX hexocell louver					
				CB cross blade, matte black finish (requires snoot)					
				CL clear glass lens					
				SOL solite beam softening lens					
				EM* emergency battery pack, available on 2, 3 or 4 light - powers only 1 head of the total fixture					
				* If this option is selected, you must also select EM option in the Frame Ordering section.					

Cylindrix® III

Semi-Recessed Multiples



PROJECT:

TYPE:

Specifications

Application

Retail and commercial accent and display lighting

Construction

Formed steel mounting frame with integral mounting bars
Thermally protected (*adds 2W to total fixture wattage*)
Steel driver housing
Steel upper housing and laser cut trim ring
Complete die-cast optical head construction
Passive cooled

Optical

Tilt: 0-45°x45°
Rotation: 360°+
Beam Spreads: Narrow Spot, 10°; Spot, 15°; Flood, 25°;
Wide Flood, 40°; Linear Spread Lens, 60° x 10°

LED

Color Temp Options: 2700K, 3000K, 3500K, 4000K, Class A
CRI: 83 typ. or 90+ typ.
Class A* LEDs available
R9 Values: 11 (83 CRI), 55 (90+ CRI)
Binning: 3 MacAdam (SDCM)
Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs
** Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.*

Electrical

Wattage: 16, 19, 23, 27, 31
Electronic constant current LED driver, 120/277VAC input
This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

Drivers

LE/TE - Leading Edge (*Triac, Forward Phase*) or Trailing Edge (*ELV, Reverse Phase*) autosensing driver dims down to 5% on most dimming systems.
0-10V, Lutron & DALI systems also available
See pages 8-10 for more dimming information

Finish

Powder coat paint
Consult Factory for custom finishes

Mounting

Hanger Bars:

Adjustable hanger bars included (14 1/2" - 25" std.)
Optional **HB49** - hanger bars from min 29" to max 49" available

Trimmed:

For use in T-Grid or GB ceilings; max ceiling thickness 1"

Trimless:

For use in GB ceilings; max ceiling thickness 5/8"
Consult Factory for thicker ceilings

Certifications

OSA listed to UL standards.
Suitable for damp locations
Indoor use only
COCA listed for use in Chicago (*specific models only*)

Warranty

5 year limited warranty

Emergency Battery Pack (EM)

Powers single head of 2, 3 or 4 light multiple at 5.1 watts (*approx. 400 Lm*) for 90 minutes. Not available on 1 light multiple

Cylindrix® III

Semi-Recessed Multiples



PROJECT:

TYPE:

Electrical Data

NOTE: System Watts includes an additional 2W for thermal protector power consumption.

1 Light

	1 x 16W		1 x 19W		1 x 23W		1 x 27W		1 x 31W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	18	0.15	21	0.18	25	0.21	29	0.24	33	0.28
277V	18	0.06	21	0.08	25	0.09	29	0.10	33	0.12

Electronic constant current LED driver

2 Light

	2 x 16W		2 x 19W		2 x 23W		2 x 27W		2 x 31W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	36	0.30	42	0.35	50	0.42	58	0.48	66	0.55
277V	36	0.13	42	0.15	50	0.18	58	0.21	66	0.24


Electronic constant current LED driver

3 Light

	3 x 16W		3 x 19W		3 x 23W		3 x 27W		3 x 31W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	54	0.45	63	0.53	75	0.63	87	0.73	99	0.83
277V	54	0.19	63	0.23	75	0.27	87	0.31	99	0.36

Electronic constant current LED driver

Accessories



Clear lens, Solite lens, Hexocell louver (fits in front door)



Snoot, 3/4" deep



Snoot, 1 1/2" deep




Linear spread lens, Hexocell louver, Cross blade (requires snoot)

PROJECT:

TYPE:

Product Details - Semi-Recessed Trimmed

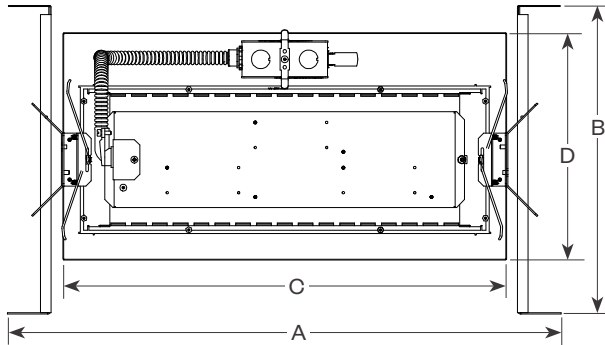


	1 Light	2 Light	3 Light
A	13 3/4"	20 1/4"	25 15/16"
B	14 1/2" max 25"	14 1/2" max 25"	14 1/2" max 25"
C	8 9/16"	15 1/16"	20 13/16"
D	10 11/16"	10 11/16"	10 11/16"


Ceiling cut out: 1 Light - 7 1/8" x 7 1/8"
 2 Light - 7 1/8" x 13 5/8"
 3 Light - 7 1/8" x 19 5/16"

End View



Standard Driver (ELV/TRIAC)

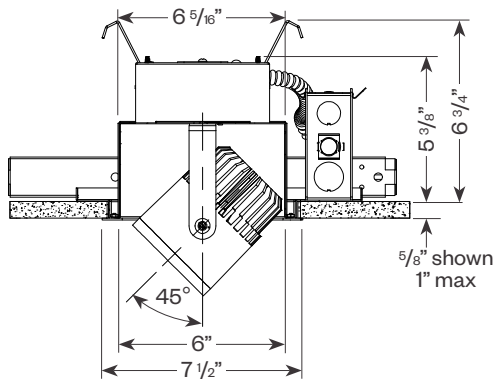

Hi-lume®/0-10V/DALI Driver

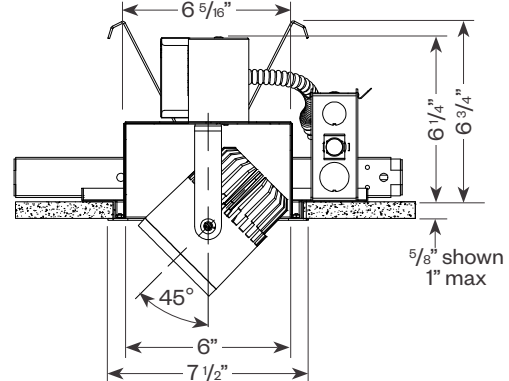

Side View

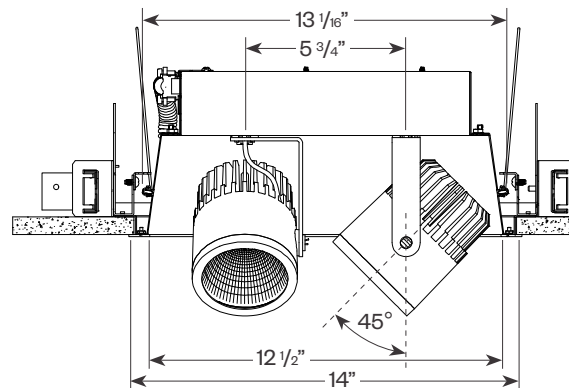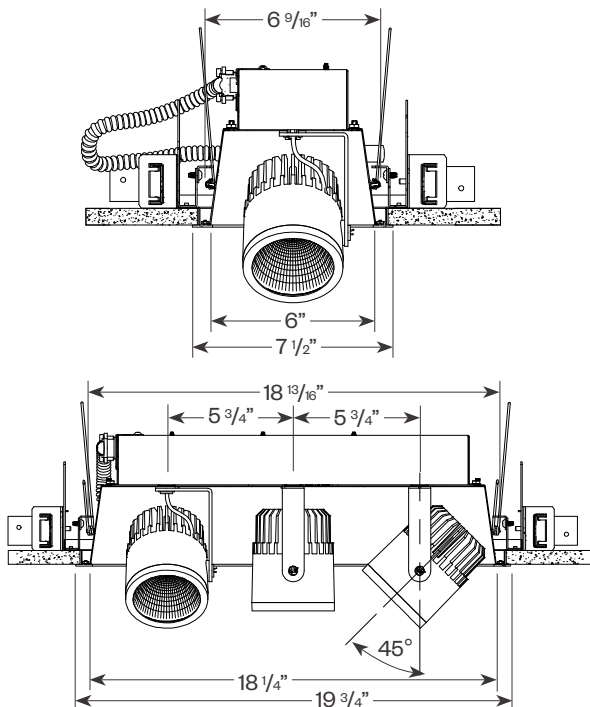

PROJECT:

TYPE:

Performance Data (per head)





Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)

OCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

Wattage:	16W	19W	23W	27W	31W
Factor:	0.51	0.61	0.74	0.87	1.0

OCT:	2700K-90+	3000K-90+	3500K-90+	4000K-90+	3CLA
Factor:	0.83	0.86	0.90	0.93	0.70

31W LED, 3000K-83

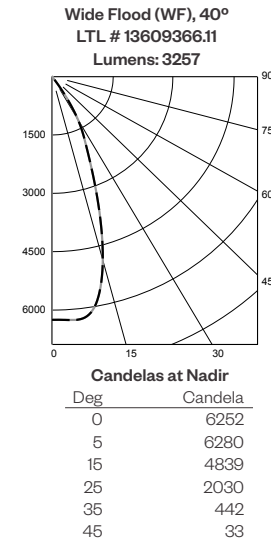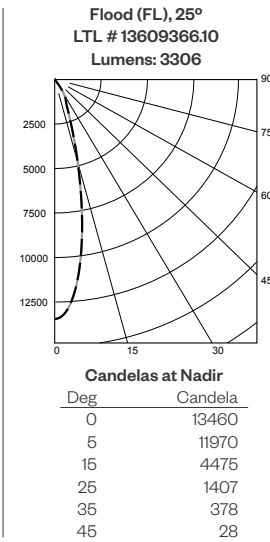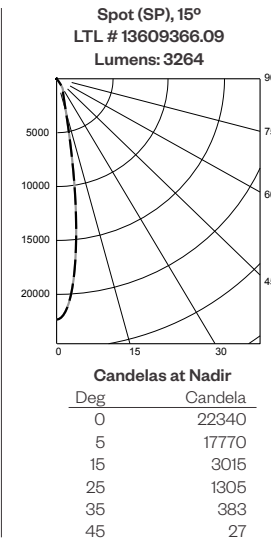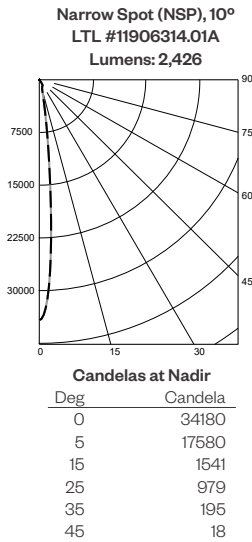

Application Data (per head)

Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).


D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).

CB=Distance across or down to center beam location.



	0° Aiming Angle Horizontal Footcandles				30° Aiming Angle Horizontal Footcandles					30° Aiming Angle Vertical Footcandles					60° Aiming Angle Vertical Footcandles				
	D	FC	L	W	D	FC	L	W	CB	D	FC	L	W	CB	D	FC	L	W	CB
NARROW SPOT	5.0'	1367	1.1	1.1	5.0'	839	1.3	1.1	3.0	3.0'	508	2.0	1.1	5.0	3.0'	1553	1.1	1.0	2.0
	7.5'	608	1.3	1.3	7.5'	384	1.9	1.4	4.0	4.0'	261	2.9	1.4	7.0	4.0'	1131	1.2	1.1	2.0
	10.0'	342	1.7	1.7	10.0'	211	2.5	2.1	6.0	5.0'	186	3.3	1.6	8.0	5.0'	846	1.2	1.1	3.0
	12.5'	219	2.3	2.3	12.5'	143	3.0	2.7	7.0	6.0'	128	4.0	2.1	10.0	6.0'	503	2.0	1.3	3.0
SPOT	5.0'	894	1.3	1.3	5.0'	559	2.1	1.5	3.0	3.0'	338	3.1	1.5	5.0	3.0'	1275	1.4	1.1	2.0
	7.5'	398	2.2	2.2	7.5'	265	2.8	2.5	4.0	4.0'	212	3.8	2.0	6.0	4.0'	903	1.6	1.2	2.0
	10.0'	224	2.9	2.9	10.0'	145	3.9	3.3	5.0	5.0'	132	4.8	2.7	7.0	5.0'	561	2.1	1.5	3.0
	12.5'	144	3.6	3.6	12.5'	95	4.7	4.2	7.0	6.0'	95	5.6	3.1	9.0	6.0'	402	2.3	1.8	3.0
FLOOD	5.0'	539	2.0	2.0	5.0'	338	2.8	2.5	3.0	3.0'	259	3.5	2.0	4.0	3.0'	814	2.1	1.4	2.0
	7.5'	240	3.1	3.1	7.5'	162	3.8	3.5	4.0	4.0'	143	4.6	2.9	5.0	4.0'	573	2.1	1.7	2.0
	10.0'	135	4.0	4.0	10.0'	92	5.1	4.5	5.0	5.0'	92	5.7	3.5	7.0	5.0'	340	2.8	2.5	3.0
	12.5'	87	5.1	5.1	12.5'	58	6.5	5.7	6.0	6.0'	65	7.0	4.2	8.0	6.0'	255	3.1	2.8	3.0
WIDE FLOOD	5.0'	284	3.3	3.3	5.0'	222	3.6	3.2	2.0	3.0'	191	3.2	2.7	3.0	3.0'	550	2.3	1.8	1.0
	7.5'	121	5.0	5.0	7.5'	95	5.4	5.1	3.0	4.0'	108	4.2	3.6	4.0	4.0'	283	3.3	3.1	2.0
	10.0'	67	6.6	6.6	10.0'	53	7.4	6.8	4.0	5.0'	69	5.5	4.6	5.0	5.0'	201	3.8	3.4	2.0
	12.5'	43	8.3	8.3	12.5'	34	9.2	8.6	5.0	6.0'	48	6.5	5.4	6.0	6.0'	138	4.6	4.3	2.0

PROJECT:

TYPE:

Dimming Compatibility

Amerlux® Cylindrix® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

TRIAC (Forward Phase) Dimming


Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (*most cases*)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

Compatible Dimmers†:	
Wall Box (TRIAC 120VAC)	Central System
Lutron "Diva"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	

TRIAC Wiring Diagram

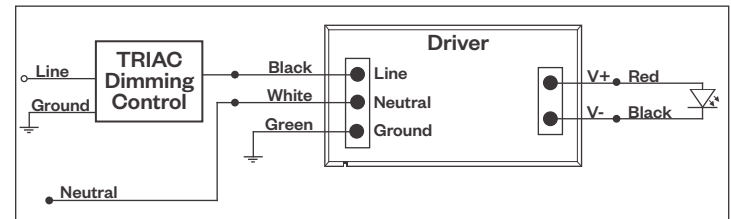

ELV - Electronic Low Voltage (Reverse Phase) Dimming


Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (*most cases*)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

Compatible Dimmers†:		
Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

ELV Wiring Diagram

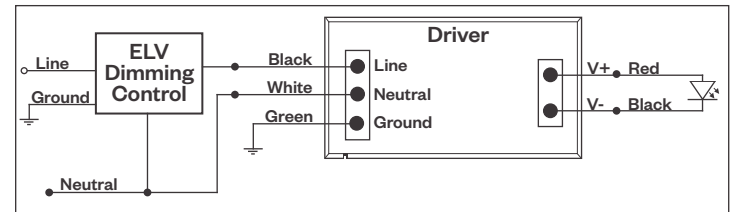

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (*by others*). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.



PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Cylindrix® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V Dimming

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

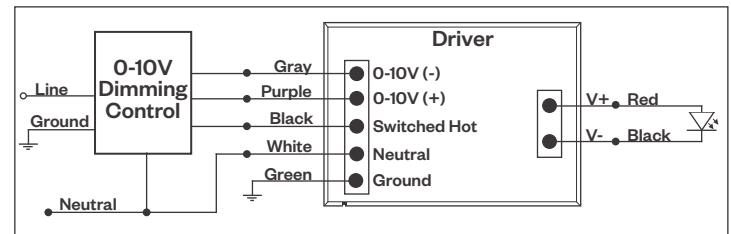

Compatible Dimmers*:

Wall Box	Central System
Lutron "Diva" - DVSTV	Lutron Renoir II 0-10V
Leviton Renoir II 0-10V	Lutron Grafik Eye with GRX-TVI Interface


Lutron LDE1 Dimming

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

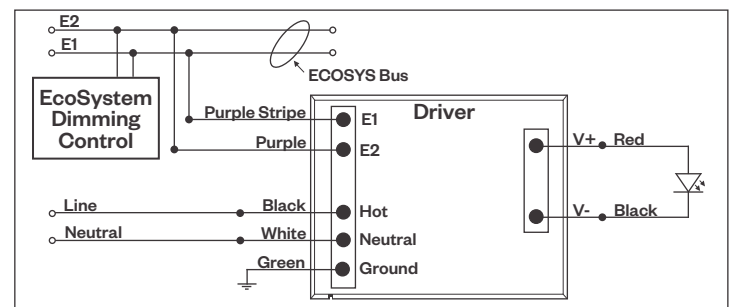

Compatible Dimmers*:

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energi Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	


DALI Dimming

Digital control protocol allows individual fixture control

Notes:

- 120VAC - 277VAC*
- Dims down to 1% light output in most cases

DALI Wiring Diagram

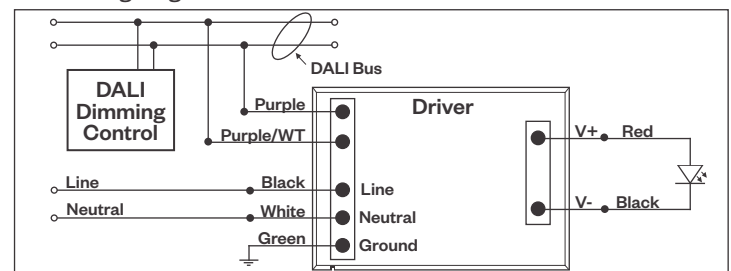

Compatible Dimmers*:

Wall Box (3-Wire Fluorescent)	Central System
Leviton CD250 Controller	Dynalite
	Fifth Light

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (*by others*). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

* The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

PROJECT:

TYPE:

Emergency Dimming

Wiring Diagram

