

PROJECT:
TYPE:

Features

The Finch® family of cylinders with a 1" aperture, features exceptional output, flexibility, and a broad range of configurations to provide discreet quality illumination while integrating into the architecture. It is available in a fixed downlight, adjustable (*with 50° tilt*), wall mount and even exterior ground mount options. Whether installed on ceilings, walls/mullions or the ground, the Finch® family blends seamlessly into its surroundings.

The Finch® wall mount cylinder, 6" in length, offers up to 1000 lm output and has a choice of beveled front door options for additional shielding for the direct portion and a flush lens for the indirect portion, to prevent dust accumulation.

Product Overview

Type: Wall Mount, Direct or Indirect
 Wattage: 6W, 8W, 10W
 Color Temp: 2400K, 2700K, 3000K, 3500K, 4000K
 CRI: 80+ or 90+ typ.
 Dimming: 0-10V, DALI



Certifications



Fixture Summary

Performance Data

Watts	Delivered Lumens	LPW	Color Temp	CRI
6	643	102.1	3000K	80+
8	787	93.7	3000K	80+
10	927	88.3	3000K	80+

Data is based on flood optic, standard bevel, 3000K, 80+ 120V IES file available on website..

Electrical Data

	6W		8W		10W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	6.3	0.054	8.4	0.071	10.5	0.088
277V	6.7	0.034	8.6	0.038	10.7	0.044

Electronic constant current LED driver.



PROJECT:

TYPE:

To Order, please specify both the light fixture and remote driver.

Step 1: Fixture Example: FIN9-WD-48V.10.309.WF.BT.GLD.DB.RC.0-10V.SOL

Step 2: Transformer Example: TR-48V100W

STEP 1: 1" Wall Mount Direct or Indirect Ordering Information

1	2	3	4	5	6	7	8	9	
1	Model	2	Wattage	3	Color Temp and CRI	4	Beam Spread	5	Body Finish
	FIN6-WD-48V 6" wall mount, direct FIN6-WI-48V 6" wall mount, indirect	6 6W (643 lm) 8 8W (787 lm) 10 10W (927 lm)	30 3000K, 80+ 35 3500K, 80+ 40 4000K, 80+ 249 2400K, 90+ 279 2700K, 90+ 309 3000K, 90+ 359 3500K, 90+ 409 4000K, 90+	SP spot, 15° FL flood, 28° WF wide flood, 35° VWF very wide flood, 50°	WT white texture BT black texture SLV matte silver BRZ bronze DBZ dark bronze <i>For custom RAL finish, consult factory</i>				
6	Bevel Finish	7	Door Style	8	Mounting	9	Drivers/Controls	9	Options/Accessories
	<u>Direct</u> MW matte white MB matte black SLV matte silver BRZ bronze DBZ dark bronze GLD gold <i>For custom RAL finish, consult factory. Omit from nomenclature when ordering GLOW door style.</i> <u>Indirect</u> <i>Finish to match body finish, omit from nomenclature.</i>	<u>Direct</u> SB standard bevel (1/4" recess) DB deep bevel (5/8" recess) GLOW frosted glow lens (1/2" drop) <u>Indirect</u> SBX standard bevel with flush lens GLOW frosted glow lens (1/2" height)	MUL mullion mount (Ø2") C canopy (Ø5") RC reduced canopy (Ø3-1/2") CDC conduit canopy (Ø4-1/8")	0-10V 0-10V, 1% dim DALI DALI, 1% dim	SOL solite beam softening lens HEX hexcell louver LS linear spread lens				

STEP 2: Transformer Ordering Information (to power integral driver)

Amerlux offers 100W 48V DC constant current transformers with enclosure.

TR-48V100W

1

1 Model
TR-48V100W 100W, 48V transformer with enclosure, 120/277V input

For enclosure drawings & wiring schematics, see pages 6-7.

PROJECT:
TYPE:

Specifications

Application

Retail, commercial and hospitality wall mounted accent lighting.

Construction

Extruded aluminum precision machined body, door & heatsink.

Optical

TIR optics

Beam Spreads: Spot 15°, Flood 28°, Wide Flood 35°,

Very Wide Flood 50°

LED

Color Temp: 2400K, 2700K, 3000K, 3500K, 4000K

CRI: 80+ & 90+ typ.

R9 Values: 11 (83 CRI), 55 (92 CRI)

Binning: 3 MacAdam (SDCM)

Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs

Finish

Powder coat paint

Consult factory for custom finishes

Mounting

Wall mount

Certifications

CSA tested to UL standards

Indoor use only

Damp location



Warranty

5 year limited warranty

Electrical


This product complies with IEEE C62.41 for surge endurance up to 2.5KV.
Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

Product Details

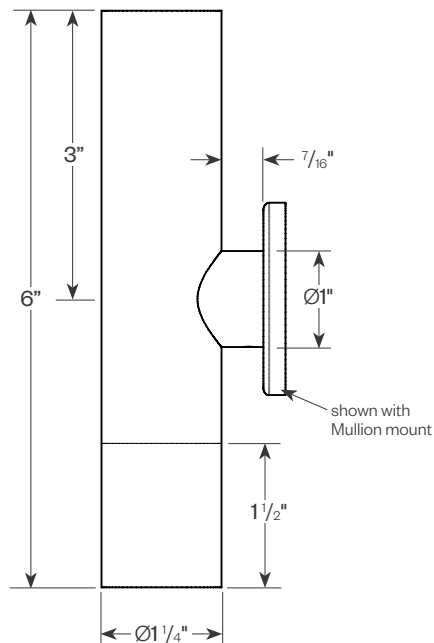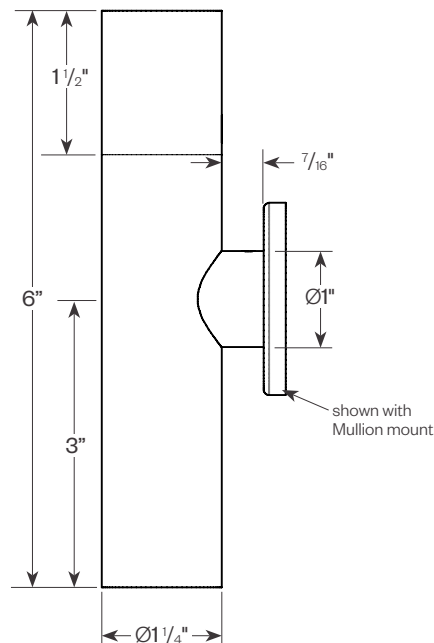FIN6-WD

FIN6-WI


PROJECT:
TYPE:

Junction Box Mounting Requirements




All Mounts Require 4" Octagonal Junction Box *(by others)*




Reduced Canopy (**RC**) Mounts also Require Raised Cover *(by others)* for 4" Octagonal Junction Box

Mounting Options


Mullion Mount

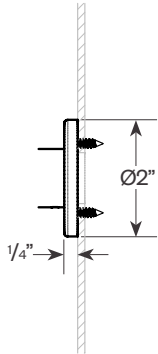


Canopy Mount

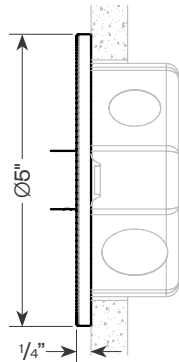

Reduced Canopy Mount


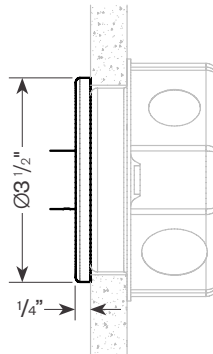


Conduit Canopy Mount

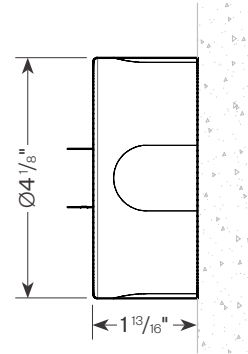


Door Styles


Direct

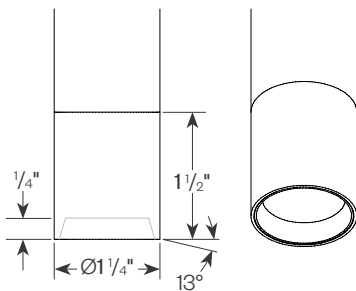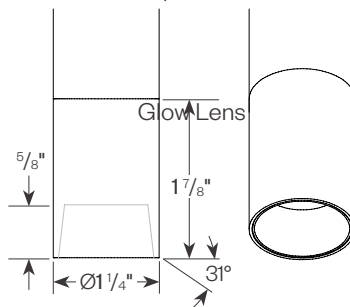 Standard Bevel (**SB**)

 Deep Bevel (**DB**)

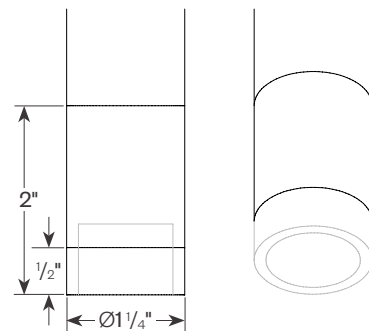
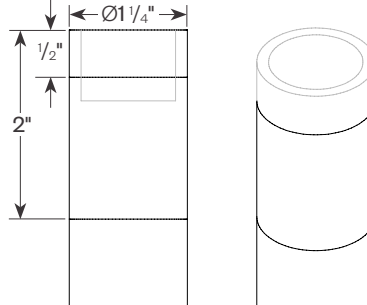
Glow Lens



Indirect

 Standard Bevel with flush lens (**SBX**)


Glow Lens



Finish Options

Powder coat paint. Consult factory for custom finishes.




Matte Black




Matte White



Matte Silver




Bronze



Dark Bronze



White Texture



Black Texture


 Gold
*Available for Bevel
 Finish only*

PROJECT:
TYPE:

Performance Data

Multiplying Factors: (Multiplying Factor is based on 3000K, 80+, 120V IES file on website)


Wattage:	6W	8W	10W	20W*
Factor:	0.44	0.54	0.64	1.0

* Multiplying factors based on IES 20W tested fixture.
 20W is not available for this fixture type.

CCT:	3000K, 80+	3500K, 80+	4000K, 80+	2400K, 90+	2700K, 90+	3000K, 90+	3500K, 90+	4000K, 90+
Factor:	1.0	1.04	1.06	0.76	0.83	0.88	0.92	0.93


20W, Standard Bevel, 3000K, 80+

Spot Distribution
 LTL # 14815215.01A
 Lumens: 1130; lm/W: 57.3

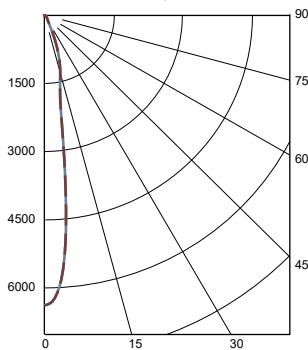


Candelas at Nadir	
Deg	Candela
0	6385
5	5036
15	1276
25	354
35	112
45	75

Flood Distribution
 LTL # 14815215.02A
 Lumens: 1459; lm/W: 73.9

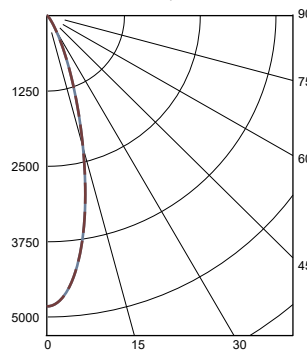


Candelas at Nadir	
Deg	Candela
0	4821
5	4439
15	2154
25	608
35	155
45	52

Wide Flood Distribution
 LTL # 14815215.03A
 Lumens: 1430; lm/W: 72.5

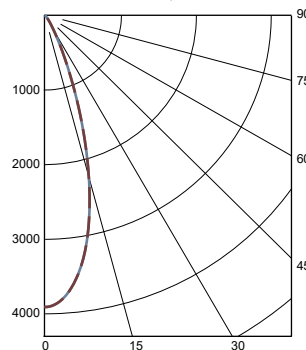

Candelas at Nadir	
Deg	Candela
0	3908
5	3714
15	2269
25	632
35	144
45	46

Very Wide Flood Distribution
 LTL # 14815215.04A
 Lumens: 1241; lm/W: 62.9

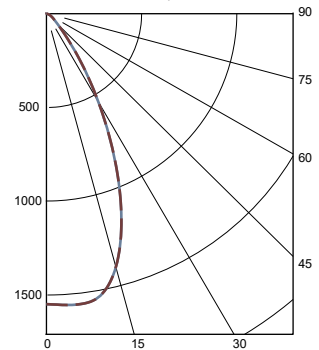

Candelas at Nadir	
Deg	Candela
0	1549
5	1558
15	1394
25	821
35	303
45	90

Application Data

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



Spot

0° Aiming Angle
 Horizontal
 Footcandles

D	FC	L	W
5.0'	158	1.9	1.9
7.5'	91	2.5	2.5
10.0'	57	3.0	3.0
12.5'	38	3.5	3.5

Flood

0° Aiming Angle
 Horizontal
 Footcandles

D	FC	L	W
5.0'	178	2.6	2.6
7.5'	85	3.6	3.6
10.0'	49	4.7	4.7
12.5'	31	5.8	5.8

Wide Flood

0° Aiming Angle
 Horizontal
 Footcandles

D	FC	L	W
5.0'	138	3.0	3.0
7.5'	66	4.3	4.3
10.0'	38	5.6	5.6
12.5'	25	7.0	7.0

Very Wide Flood

0° Aiming Angle
 Horizontal
 Footcandles


D	FC	L	W
5.0'	61	4.2	4.2
7.5'	27	6.3	6.3
10.0'	16	8.4	8.4
12.5'	10	10.6	10.6

PROJECT:

TYPE:

Power Supply Options for Integral Driver

TR-48V100W 100W, 48V transformer with enclosure, 120/277V input

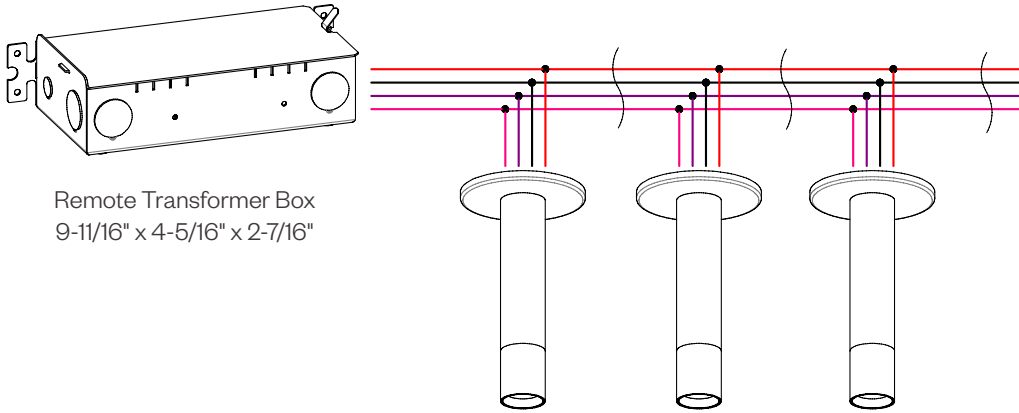

Remote Transformer Box
9-11/16" x 4-5/16" x 2-7/16"

PROJECT:
TYPE:


Dimming Compatibility

Amerlux® Finch® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux® recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

0-10V DIMMING Integrates into a variety of building management and daylighting controls

0-10V Wiring Diagram

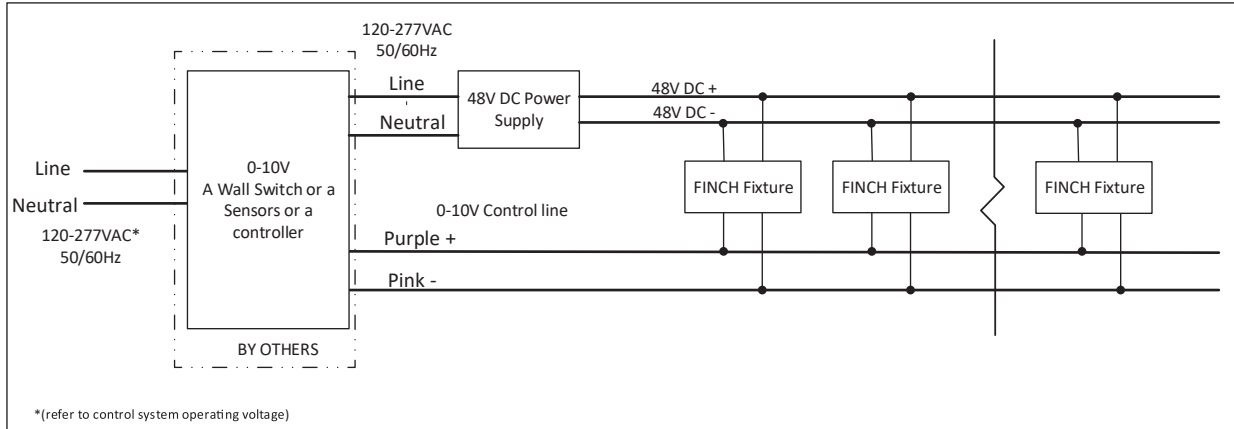

Compatible Dimmers*:


Wall Box	Central System
Lutron "Diva" - DVSTV	Lutron Grafik Eye with GRX-TVI Interface
Leviton Renoir II 0-10V	

Notes:

- Dims down to 1% light output
- Consult Dimming manufacturer for the operation and installation instructions **DO NOT SHARE NEUTRALS!**

DALI DIMMING Digital control protocol allows individual fixture control

DALI Wiring Diagram

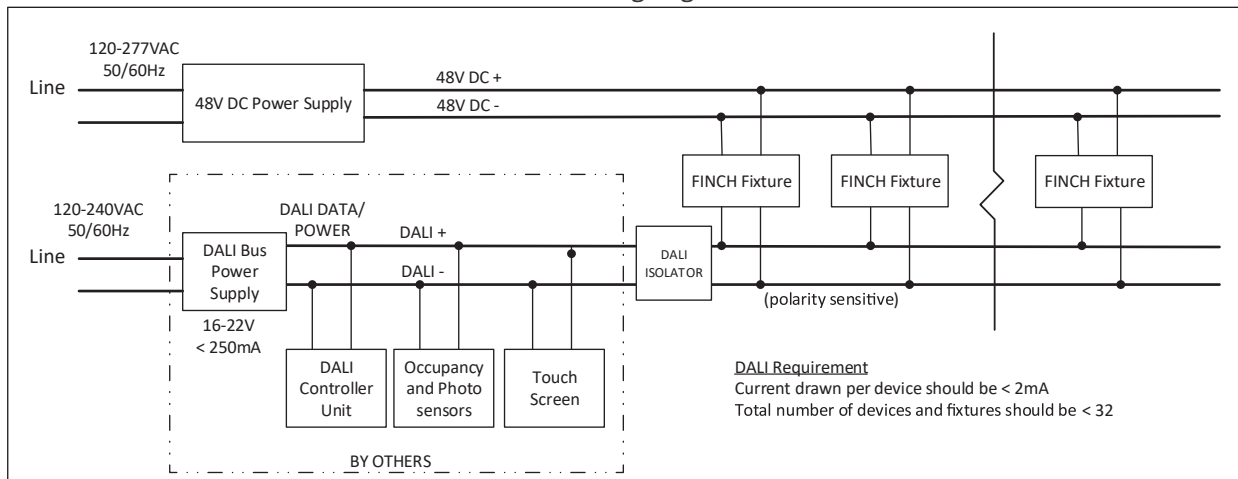

Suggested Switches for Wired Connections:

Manufacturer	Model	
Loytec DALI PSU	L-DALI-PWR2-U	DALI Bus Power Supply, 85-240VAC input, 2 channel DALI PSU, 116mA per channel
Loytec Controller	L-DALI-ME204-U	DALI Controller, 4 channel DALI
Loytec Controller	L-DALI-ME201-U	DALI Controller, 1 DALI channel with integrated DALI power supply
B.E.G	PP-DALI-PS	DALI Bus Power Supply, 120-277VAC input, 100mA bus power