

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Features


Hornet 2.5 - the lighting solution that sets a new standard in comfort and performance. With its unique design, the Hornet 2.5 features a deep bevel and low-intensity flashing that provides an unparalleled level of comfort without compromising on performance.

Hornet 2.5 is not only comfortable, but it's also incredibly energy-efficient. With efficacy above 100 lm/W, the Hornet 2.5 meets modern energy-saving goals and delivers the highest efficacy possible, thanks to its new generation LED technology and optical package.

Despite its compact size, the Hornet 2.5 comes with a standard integral driver, making it fully serviceable from below. It offers adjustable and wall wash options, as well as trimless and millwork options, making it a versatile solution that can fit any space or design.

Product Overview


Type: Recessed Square Downlight, Adjustable, Wall Wash
Wattage: 6W, 8W, 10W, 12W, 16W, 19W
Color Temp: 2700K, 3000K, 3500K, 4000K
CRI: 90+ typ.
Dimming: Wired: TRIAC & ELV, Hi-lume®, 0-10V, DALI
Wireless: Lutron Athena RF node, BubblyNet Bluetooth



HDL2.5-SD




HDL2.5-SD-TL/MWK




HDL2.5-SA



HDL2.5-SA-TL/MWK



HDL2.5-SW



HDL2.5-SW-TL/MWK

Certifications



Fixture Summary

Performance Data

Watts	Delivered Lumens	LPW	CBCP	Color Temp, CRI
6	701	116.8	2552	3000K, 90+
8	915	114.4	3331	3000K, 90+
10	1129	112.9	4111	3000K, 90+
12	1343	112	4891	3000K, 90+
14	1558	111.3	5670	3000K, 90+
16	1752	109.5	6379	3000K, 90+
19	1947	103.6	7088	3000K, 90+

Data is based on 3000K-90+ IES files available on website.

Data is based on HDL2.5-SD 30° Medium Flood optics. For other beam spreads see pages 7-9.

Fixture Type

Round/Square	New Construction	Trim	Trimless	Millwork
Yes	Yes	Yes	Yes	Yes

See separate spec sheet for Square trims

Electrical Data

	6W		8W		10W		12W		14W		16W		19W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	6	0.05	8	0.07	10	0.08	12	0.10	14	0.12	16	0.14	19	0.16
277V	6	0.02	8	0.03	10	0.04	12	0.05	14	0.05	16	0.06	19	0.07

Electronic constant current LED driver.

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Ordering Information - Housing/Frame

1	2	3	4	5
1 Model	2 Style	3 Wattage		
HDL2.5-S-NC (New Construction) HDL2.5-S-CP (Chicago Plenum (CCEA) housing) HDL2.5-S-IC (Insulated Ceiling/air tight, 12W max)	T trimmed TL trimless MWK millwork (for 1/2" - 11/16" ceiling thickness) MWK1 millwork (for 3/4" - 1-1/2" ceiling thickness) <i>Note: For up to 2" ceiling, consult factory.</i>	6 8 10 12 14 (not available with IC) 16 (not available with IC) 19 (not available with IC)		
4 Driver (for non-dimming, select LE/TE option)	5 Options/Accessories			
<u>Wired</u> LE/TE TRIAC/ELV dimming HILUME-P-ECO - Lutron Hi-lume® EcoSystem Premier 0.1% dim with soft on and fade to black 0-10V 0-10V dimming, 1% dim 0-10V-DD* 0-10V dimming, 0.1% deep dimming DALI DALI dimming, 1% dim DALI-DD* DALI dimming, 0.1% deep dimming <u>Wireless</u> (New Construction only) AWN-010* Lutron Athena wireless node, RF only, 0-10V BN-BT-010* BubblyNet Bluetooth node, 0-10V <i>* Consult factory for lead time.</i>	HB49 - hanger bars from min 29" to max 49" <i>Note: 26" hanger bars are included as standard. Choose HB49 option above for larger mounting spaces only.</i>			

Ordering Information - Trim

1	2	3	4	5	6
1 Model	2 Style	3 Finish			
HDL2.5-SD (downlight) HDL2.5-SA (adjustable) HDL2.5-SW (wall wash)	T trimmed TL trimless MWK millwork	<u>Trimmed</u> MWW matte white, white flange MBW matte black, white flange SLVW matte silver, white flange MBB matte black, black flange SLVS matte silver, silver flange <u>Trimless/Millwork</u> MB matte black MW matte white SLV matte silver			
4 Beam Spread (not required for RW model)	5 Color Temp	6 Options/Accessories (not available for SW model)			
20D narrow flood 20° 30D medium flood 30° 40D flood 40° 50D wide flood 50° <i>For 10° super narrow spot distribution, see HDL2.5-SA-SNSP spec sheet. (Note: This option is only for the adjustable model)</i> <i>For Shallow Trim with 60° or 80° beam, see HDL2.5-SDS spec sheet. (Note: this option is only for the downlight model).</i>	279 2700K-90+ 309 3000K-90+ 359 3500K-90+ 409 4000K-90+	HEX hexcell louver SOL solite beam softening LS linear spread lens SHW shower, comes standard with solite lens, not compatible with other options/accessories (only available for (SD) downlight model & (T) trimmed style)			

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Specifications

Application

Retail and commercial ambient, hospitality lighting

Optical

Downlight/Adjustable:

Beam spreads: Narrow Flood 20°, Medium Flood 30°, Flood 40°,
Wide Flood 50°

Adjustable Tilt: 40° max

LED

Color Temp Options: 2700K, 3000K, 3500K, 4000K

CRI: 90+ typ.

R9 Values: 55 (92 CRI)

Binning: 3 MacAdam (SDCM)

Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs

Electrical

Wattage: 6W, 8W, 10W, 12W, 14W, 16W, 19W

Electronic constant current LED driver, universal operating voltage
120/277VAC input.

This product complies with IEEE C62.41 for surge endurance up to 2.5KV.

***Amerlux® recommends using additional surge protection with this unit
(supplied by others), surge and over voltage damage is not covered under
warranty.***

Drivers

Universal Operating Voltage 120/277VAC.

Smooth linear dimming curve to minimum dim of 1% or 0.1%.

UL8750 with Class 2 output.

Complies with FCC Part 15, Class A.

UL Listed Class P.

Built-in protection feature (short circuit, overload, Thermal, 2.5kV surge).

See dimming compatibility page for additional information.

Finish

Powder coat paint/wet paint

Consult factory for custom finishes

Mounting

26" Hanger bars included.

Optional **HB49** - hanger bars from min 29" to max 49" available.

Trimmed Fixture:

For use in grid or sheetrock ceilings, 1/2" to 1-1/2" standard.

Trimless Fixture:

For use in sheetrock ceilings, max ceiling thickness 1-1/2".

Patent pending screwless mud-ring.

Millwork Fixture:

Millwork extension collars are based on ceiling material specifications
and thickness. Provides flush trim appearance level with ceiling material.
Max thickness 1-1/2".

Ceilings thicker than 3/4" will require an extension collar.

***Consult factory for ceilings above 1-1/2" thickness (downlight & wall wash
only).***

Certifications

CSA damp as tested to UL 1598 standards

IC/AT rated (optional, 12W max)


Damp location

Wet location (interior, shower trim only)

Warranty

5 year limited warranty (see Amerlux website for details)

Accessories (not available for SW model)



Hexcell Louver, Solite Lens/Film, Linear Spread Lens



Hornet® 2.5



2.5" Square Downlights




PROJECT:

TYPE:


Product Details - Downlight

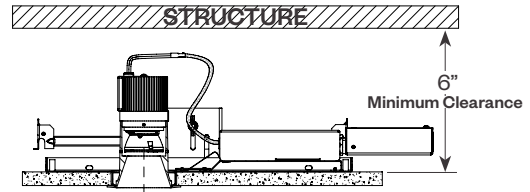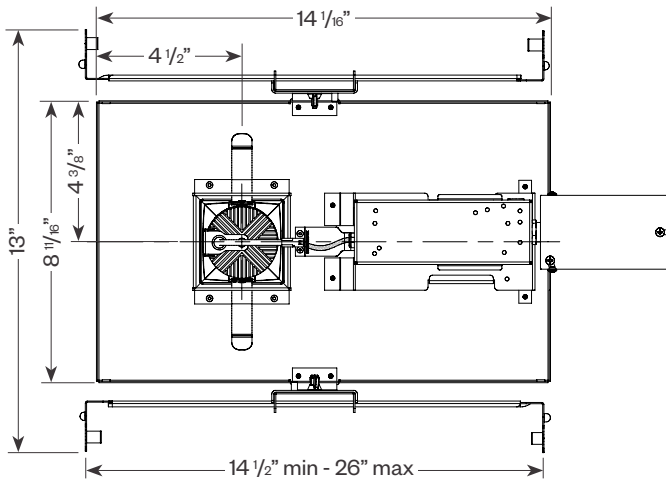


IC/AT & CP Housing

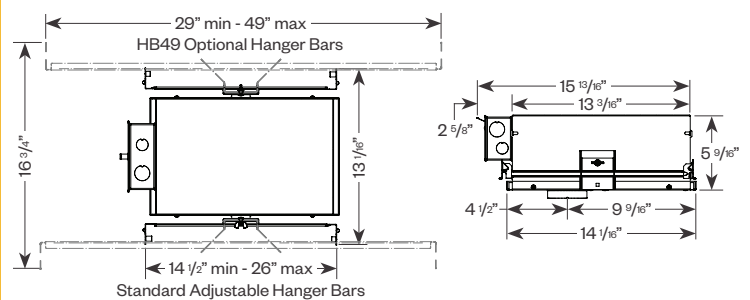


Downlight Trimmed

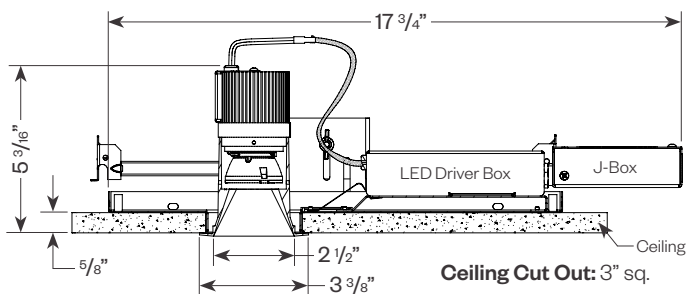


Downlight Trimless

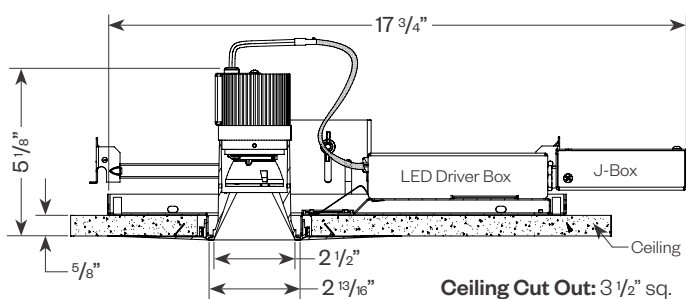


Trimless Detail

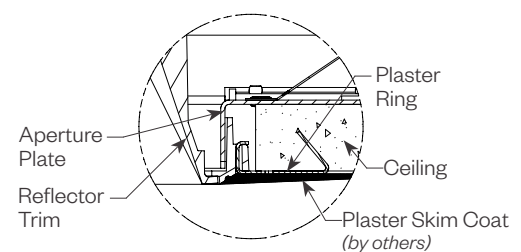

Downlight Millwork

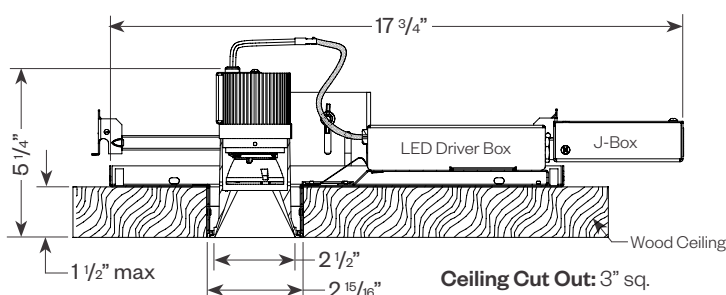

Millwork Detail

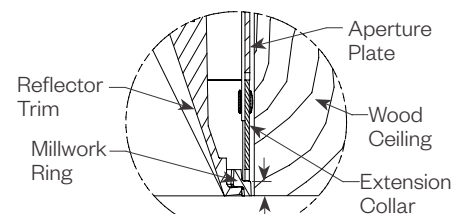

1/4" Required for the trim to be flush with ceiling.

Hornet® 2.5



2.5" Square Downlights



PROJECT:


TYPE:

Product Details - Adjustable

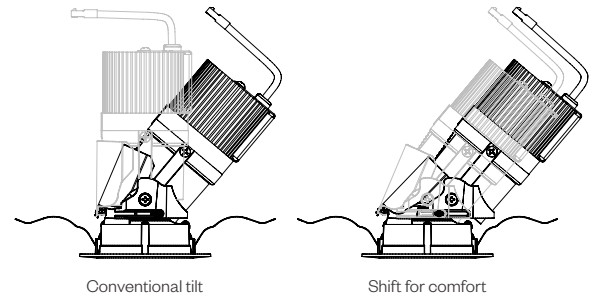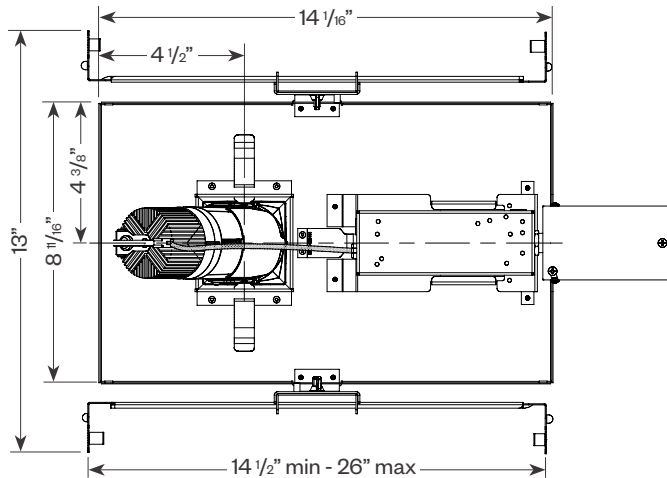


Note: 3/4" maximum ceiling thickness for optimal adjustability.


Adjustable Trimmed

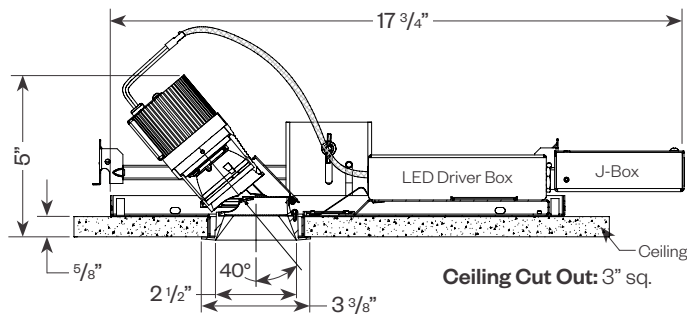


Adjustable Trimless

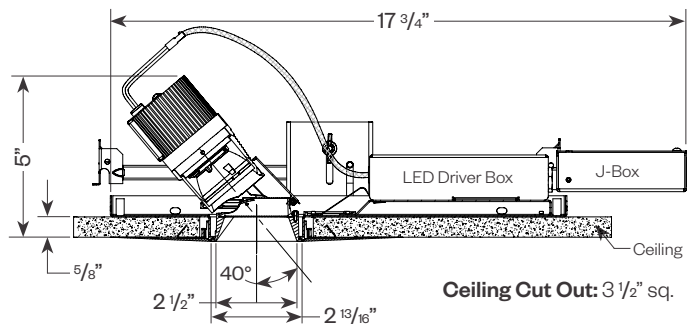


Trimless Detail

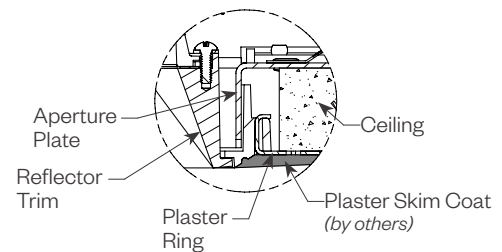

Adjustable Millwork

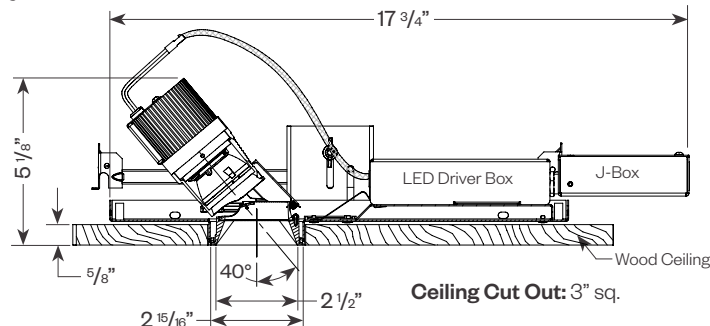

Millwork Detail

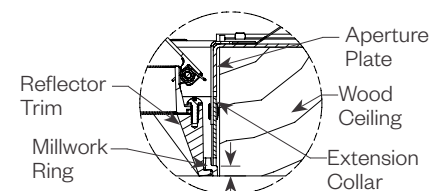

1/4" Required for the trim to be flush with ceiling.

Hornet® 2.5


2.5" Square Downlights




PROJECT:

TYPE:


Product Details - Wall Wash

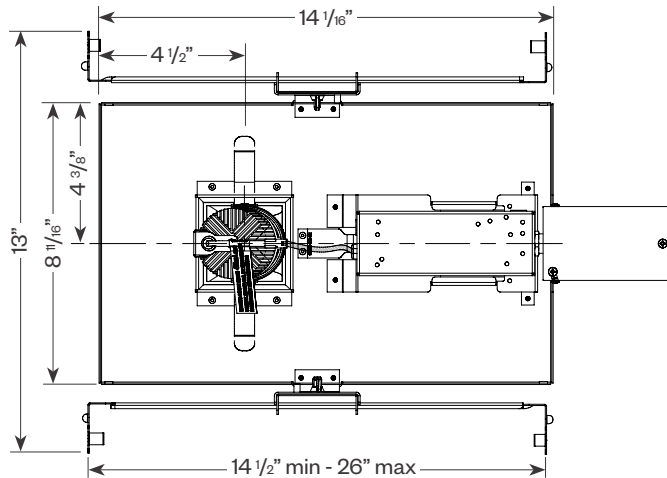


Wall Wash Trimmed

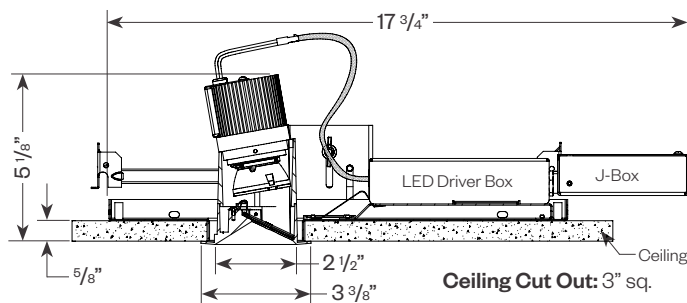


Wall Wash Trimless

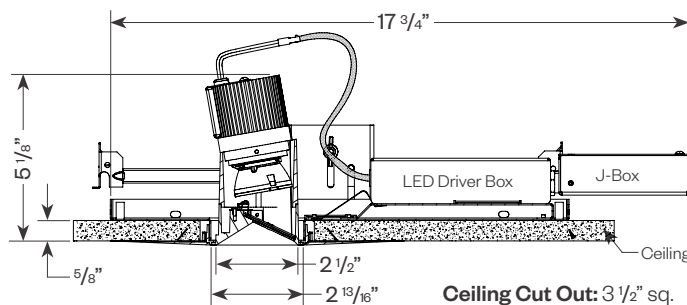


Trimless Detail

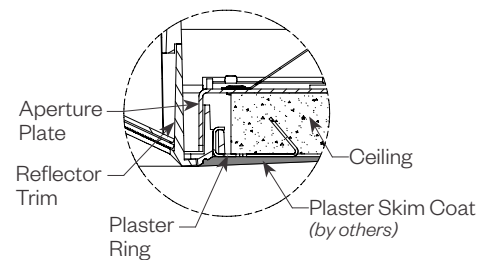

Wall Wash Millwork

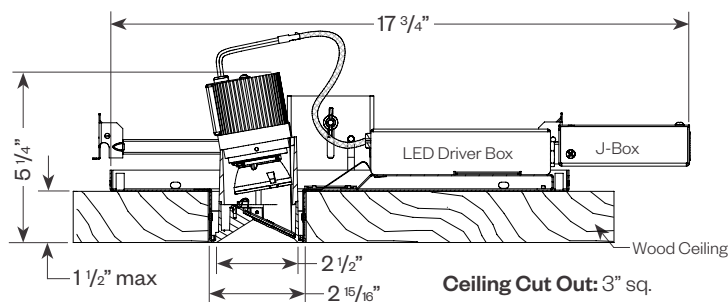

Millwork Detail

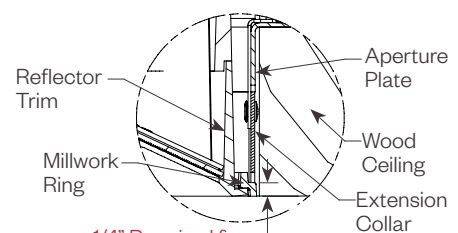

1/4" Required for the trim to be flush with ceiling.

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:





Performance Data - Square Downlight (HDL2.5-SD)

Multiplying Factors: (Multiplying Factor is based on 3000K-90+ 120V IES file on website)

Wattage:	6W	8W	10W	12W	14W	16W	19W
Factor:	0.36	0.47	0.58	0.69	0.80	0.90	1.0

CCT:	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factor:	1.005	1.000	1.016	1.029

19W LED, 3000K-90+

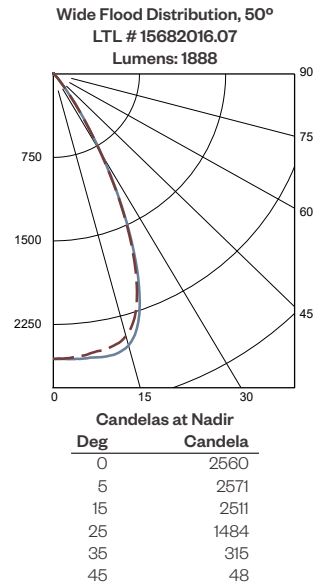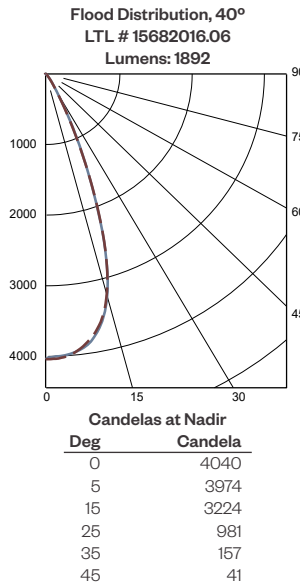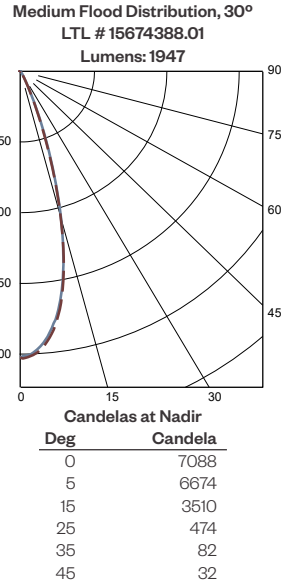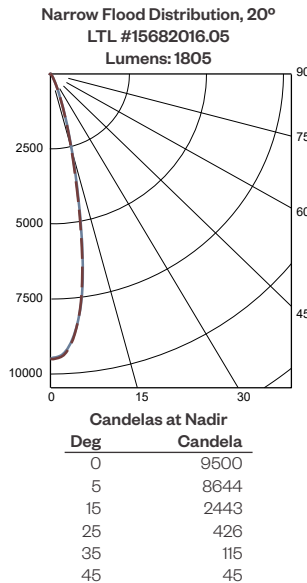

Application Data - Square Downlight (HDL2.5-SD)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



Narrow Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	301	2.2	2.2
	7.5'	153	3.1	3.1
	10.0'	90	3.9	3.9
	12.5'	59	4.9	4.9

Medium Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	248	2.7	2.7
	7.5'	119	3.8	3.8
	10.0'	68	5.1	5.1
	12.5'	44	6.4	6.4

Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	153	3.4	3.4
	7.5'	70	5.2	5.2
	10.0'	40	6.9	6.9
	12.5'	26	8.6	8.6

Wide Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	100	4.5	4.5
	7.5'	45	6.7	6.7
	10.0'	25	8.9	8.9
	12.5'	17	11.1	11.1

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Performance Data - Square Adjustable (HDL2.5-SA)


Multiplying Factors: (Multiplying Factor is based on 3000K-90+ 120V IES file on website)

Wattage:	6W	8W	10W	12W	14W	16W	19W
Factor:	0.36	0.47	0.58	0.69	0.80	0.90	1.0

CCT:	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factor:	1.005	1.000	1.016	1.029


19W LED, 3000K-90+

Narrow Flood Distribution, 20°
LTL #15657122.09
Lumens: 1617




Candelas at Nadir	
Deg	Candela
0	10030
5	9012
15	2369
25	275
35	32
45	6

Medium Flood Distribution, 30°
LTL #15657122.10
Lumens: 1791




Candelas at Nadir	
Deg	Candela
0	7008
5	6637
15	3529
25	396
35	32
45	4

Flood Distribution, 40°
LTL #15657122.11
Lumens: 1754



Candelas at Nadir	
Deg	Candela
0	3920
5	3892
15	3181
25	954
35	80
45	6

Wide Flood Distribution, 50°
LTL #15657122.12
Lumens: 1694



Candelas at Nadir	
Deg	Candela
0	2620
5	2597
15	2455
25	1338
35	205
45	9

Application Data - Square Adjustable (HDL2.5-SA)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



Narrow Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	309	2.1	2.1
	7.5'	169	3.0	3.0
	10.0'	94	3.8	3.8
	12.5'	62	4.7	4.7

Medium Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	244	2.7	2.7
	7.5'	117	3.9	3.9
	10.0'	67	5.2	5.2
	12.5'	44	6.4	6.4

Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	149	3.4	3.4
	7.5'	68	5.2	5.2
	10.0'	39	7.0	7.0
	12.5'	25	8.7	8.7

Wide Flood	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
	5.0'	101	4.3	4.3
	7.5'	46	6.3	6.3
	10.0'	26	8.5	8.5
	12.5'	17	10.6	10.6

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:


Performance Data - Square Wall Wash (HDL2.5-SW)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)

Wattage:	6W	8W	10W	12W	14W	16W	19W
Factor:	0.36	0.47	0.58	0.69	0.80	0.90	1.0

CCT:	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factor:	1.005	1.000	1.016	1.029

19W LED, 3000K-90+

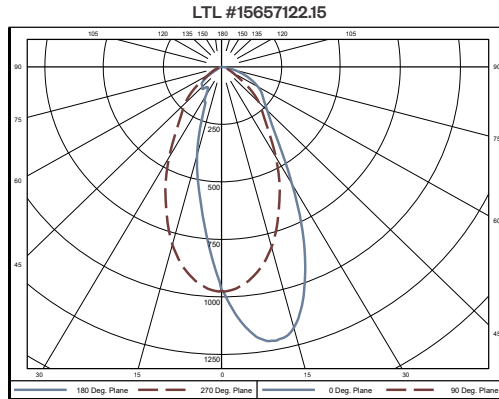

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fxt
0-40	751	68.0
0-60	1014	91.7
0-90	1105	100.0
90-180	0	0.00

Luminaire Efficacy: 59.4 lm/W

Application Data - Square Wall Wash (HDL2.5-SW)

1.5 Feet from Wall

		1.5'		1.5'		1.5'		1.5'	
Distance from ceiling	0.5'	37	44	45	45	45	44	37	
	1.5'	63	77	81	82	81	77	62	
	2.5'	58	71	77	78	77	71	57	
	3.5'	45	56	61	62	61	56	46	
	4.5'	33	40	44	45	44	40	33	
	5.5'	24	28	31	32	31	28	24	
	6.5'	18	21	23	23	23	21	18	
	7.5'	14	16	17	17	17	16	14	

Footcandles are average and rounded off.

Data for multiple units are based on a minimum of five units.

1.5 Feet from Wall

		← 2' →		← 2' →		← 2' →		← 2' →		
Distance from ceiling	0.5'	32	33	36	34	36	33	36	32	32
	1.5'	53	59	62	62	63	62	62	59	52
	2.5'	48	56	59	60	60	60	59	56	47
	3.5'	37	44	48	48	49	49	47	44	38
	4.5'	27	32	35	36	36	36	35	32	27
	5.5'	20	23	25	26	26	26	25	23	20
	6.5'	15	17	19	19	20	19	19	17	15
	7.5'	12	13	14	15	15	15	14	13	11

2 Feet from Wall

		← 2' →		← 2' →		← 2' →		← 2' →			
Distance from ceiling	0.5'	18	20	520	21	21	20	21	19	18	
	1.5'	36	42	44	45	45	45	44	42	36	
	2.5'	36	43	46	47	47	47	46	43	36	
	3.5'	33	39	42	43	44	43	42	39	33	
	4.5'	28	32	36	37	37	37	36	33	27	
	5.5'	22	26	28	29	30	29	28	26	22	
	6.5'	17	20	22	23	23	23	22	20	17	
	7.5'	14	16	17	18	18	18	17	16	14	

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Dimming Compatibility

Amerlux® Hornet® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

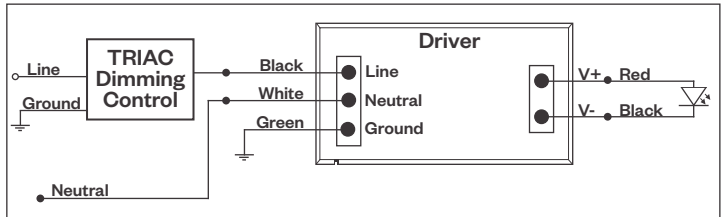

Compatible Dimmers†:

Wall Box (TRIAC 120VAC)	Central System
Lutron "Diva"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	


ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

ELV Wiring Diagram

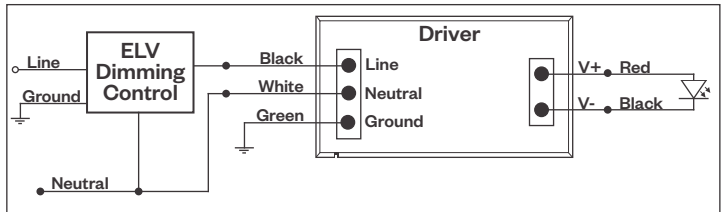

Compatible Dimmers†:

Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.



Delta Intelligent Building Technologies

178 Bauer Drive, Oakland, NJ 07436 • P: 973-882-5010 F: 973-882-2605 • amerlux.com
Amerlux reserves the right to change details that do not affect overall function and performance.
LIT-2421 • 03/31/26 • Page 10 of 11

Hornet® 2.5

2.5" Square Downlights



PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Hornet® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

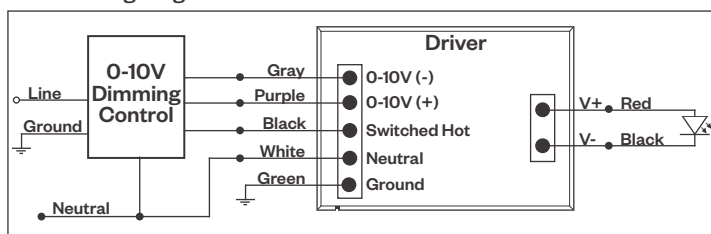

Compatible Dimmers*:

Wall Box

Lutron "Diva" - DVSTV | Leviton Renoir II 0-10V

Central System

Lutron Grafik Eye with GRX-TVI Interface

LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**


Compatible Dimmers*:

Lutron ECO System

Central System

Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energj Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

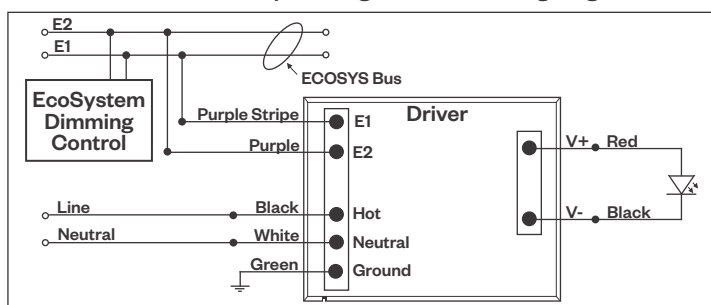

DALI DIMMING

Digital control protocol allows individual fixture control

Notes:

- 120VAC - 277VAC*
- Dims down to 1% light output in most cases


Compatible Dimmers*:

Wall Box (3-Wire Fluorescent)

Central System

Leviton CD250 Controller	Dynalite
	Fifth Light

DALI Wiring Diagram

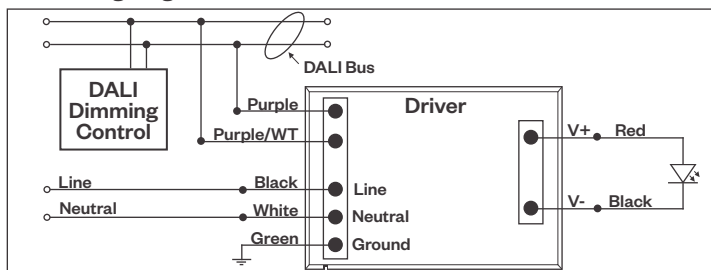

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.