

Passo CR

6" Stainless Steel Soft Glow LED Recessed Wall Luminaire



PROJECT:

TYPE:

Features

The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of three output levels to help tailor the desired illuminance to the project and a standard 0-10V dimmable driver allows even further flexibility.

Product Overview

Type: Recessed Wall Luminaire
 Wattage: up to 12.6W
 Lumen Output: up to 470 lm
 Color Temp: 2700K, 3000K, 4000K
 Dimming: 0-10V



Certifications



Fixture Summary

Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Stainless steel faceplate (316L)
- 1/8" tempered glass lens with opal coating

Driver:

- Drive current (175, 350 or 700mA)
- 2.5kV surge protection
- Fully potted
- Input voltage 120V-277V auto-sensing
- 0-10V dimmable down to 10%

Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

Finish:

Premium quality thermoset polyester powdercoat faceplate for a durable finish.

ETL listed, suitable for wet locations.

Passo CR

6" Stainless Steel Soft Glow LED Recessed Wall Luminaire



PROJECT:

TYPE:

Ordering Information - Luminaire

1	2
1 Model	2 Performance Code
PCSS6	L27 2700K, 175mA
PCSG6 (with crossguard, see below)	L30 3000K, 175mA
	L40 4000K, 175mA
	H27 2700K, 350mA
	H30 3000K, 350mA
	H40 4000K, 350mA
	VH27 2700K, 700mA
	VH30 3000K, 700mA
	VH40 4000K, 700mA

Ordering Information - Back Box


Back Box must be ordered for a complete unit, ordered separately.

CRBX-6


1
1 Model
CRBX-6

Note: Back Box can be shipped ahead of the steplight, upon request.

Product Detail

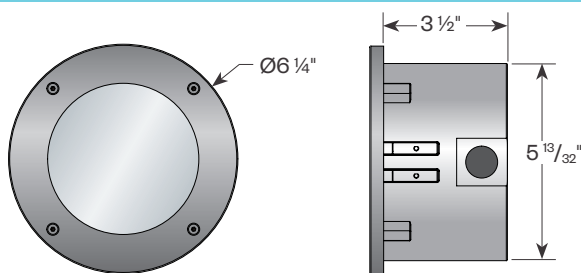

Product Detail - Crossguard Faceplate (PCSG6)

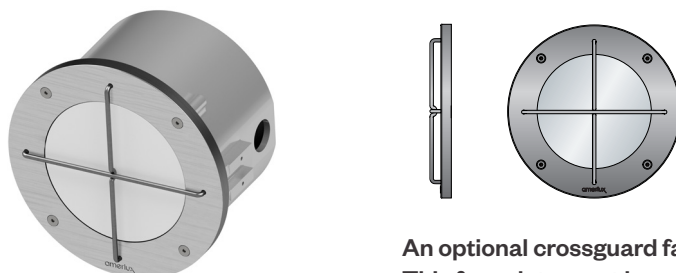

An optional crossguard faceplate is available.
This faceplate must be specified at the time of order.

Passo CR


6" Stainless Steel Soft Glow LED Recessed Wall Luminaire




PROJECT:

TYPE:

Construction Detail

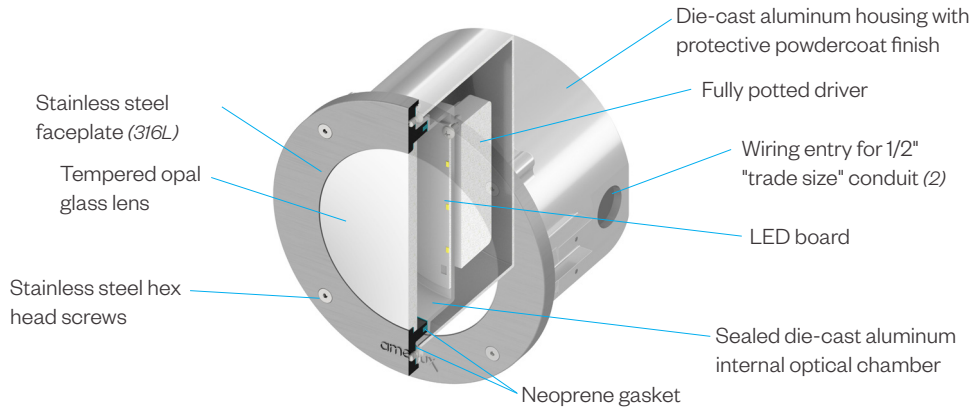

Application Brackets (included with order)



Horizontal Brackets
(Hollow Wall)

Performance Data

Performance Code	CCT/CRI	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K/80	118	175mA	3.4W
L30	3000K/80	124		
L40	4000K/70	133		
H27	2700K/80	236	350mA	6.3W
H30	3000K/80	248		
H40	4000K/70	265		
VH27	2700K/80	418	700mA	12.6W
VH30	3000K/80	439		
VH40	4000K/70	470		

Note: IES files available on our website. For VHxx data - use Hxx IES files with a 1.77 multiplier.

Polar Graph

