

HORNET® HP DOWNLIGHT

3.5" ROUND PINHOLE ADJUSTABLE SLOT LED INTERNATIONAL

APPLICATIONS:

Retail and commercial accent & display lighting

CONSTRUCTION:

Die-cast aluminum trim ring
Die-cast optical head construction
Spring steel retaining clips
Formed steel faceplate

ELECTRICAL:

Electronic constant current LED driver, 240v input
ELV & Triac dimming standard

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge damage is not covered by warranty.

OPTICS:

LED:

Color Temp Options: 2200K, 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. (2700K, 3000K, 3500K, 4000K)

90+ typ. (2200K, 2700K, 3000K)

Optional Amerlux CrispWhite technology (16W max)

R9 Value: 11 (83CRI), 55 (90+CRI)

Binning: 3 MacAdam (SDMC)

Lumen Maintenance: >70% of initial lumens @ 50,000 hrs
Lumen Output (at 3000K):

16W:SP 914 typ

NF 818 typ

MFL 766 typ

FL 750 typ

0-30° tilt, 358° rotation

18W:SP 1016 typ

NF 909 typ

MFL 851 typ

FL 833 typ

LABELING:





For indoor use only

I-HDL-HP-
RPAS-A14
LED




PROJECT:

TYPE:

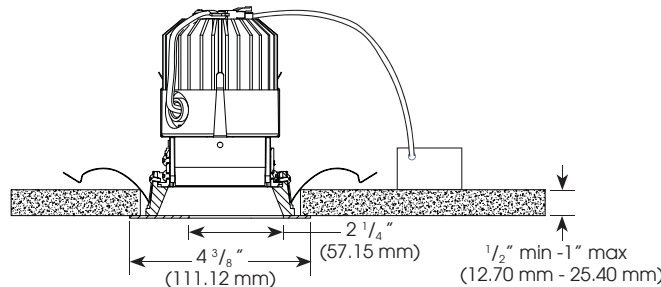

Ceiling Cut Out Dimension: 3 55/64" (98 mm)

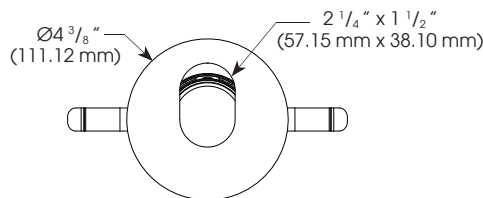

ELECTRICAL

Electronic driver

240 v	11 W		16 W		18 W	
	System Watts	Amps	System Watts	Amps	System Watts	Amps
	11	0.05	16	0.07	18	0.08

ORDERING INFORMATION:

Model	Wattage	Lamp Type	Voltage	Trim Finish	Beam Spread	Color Temp (CCT-CRI)	Listing Code	Options/Accessories
HDL-HP-RPAS-A14	11 16 18	LED	240	MW - matte white MB - matte black SLV - matte silver PC - polished chrome BSS - brushed stainless steel	SP - spot, 15° NF - narrow flood, 20° MFL - medium flood, 24° FL - flood, 28°	27 - 2700K-83 30 - 3000K-83 35 - 3500K-83 40 - 4000K-83 229 - 2200K-90+ 279 - 2700K-90+ 309 - 3000K-90+ CRISP - CrispWhite (16W max)	CE	HEX - hexcell louver SOL - solite beam softening lens DALI - DALI driver

Example: HDL-HP-RPAS-A14-18-LED-120-MW-FL-30-CE

Cat #:

Amerlux reserves the right to change details that do not affect overall function and performance.

Electrostatic sensitive device,
observe precautions for
handling



98 mm

3 year limited
warranty
AMERLUX INTERNATIONAL
(see website for details)

HORNET® HP DOWNLIGHT

3.5" ROUND PINHOLE ADJUSTABLE SLOT LED INTERNATIONAL

I-HDL-HP-
RPAS-A14
LED



TYPE:




FIXTURE DATA: For 11W data, multiply by 0.62; For 16W data, multiply by 0.88

Complete photometric data (ies format) available upon request.

CCT Conversion Factor: 2700K-83 = 0.96; 3500K-83 = 1.02; 4000K-83 = 1.04; 2200K-90+ = 0.71; 2700K-90+ = 0.80; 3000K-90+ = 0.83; CRISP = 0.65


18W LED 3000K-83

SPOT
DISTRIBUTION
LTL # 818220




Candelas at Nadir	
Deg	Candela
0	8708
5	7439
15	1282
25	33
35	5
45	0

NARROW FLOOD
DISTRIBUTION
LTL # 818221




Candelas at Nadir	
Deg	Candela
0	6311
5	5258
15	1202
25	62
35	7
45	0

MEDIUM FLOOD
DISTRIBUTION
LTL # 818222



Candelas at Nadir	
Deg	Candela
0	4560
5	3994
15	1320
25	116
35	8
45	0

FLOOD
DISTRIBUTION
LTL # 818223




Candelas at Nadir	
Deg	Candela
0	4055
5	3556
15	1218
25	113
35	8
45	0

APPLICATION DATA:

Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).
D=Distance to floor or wall.
FC=Footcandles on floor or wall at center beam aiming location.
L=Effective Visual Beam length in feet (50% of maximum footcandle level).
W=Effective Visual Beam width in feet (50% of maximum footcandle level).
CB=Distance across or down to center beam location.

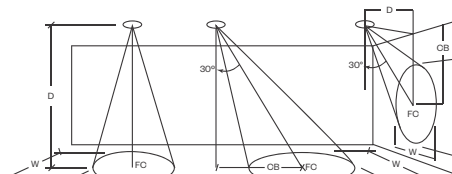

0° Aiming Angle
Horizontal
Footcandles

	D	FC	L	W
SPOT	5.0'	233	2.0	1.9
	7.5'	127	2.6	2.6
	10.0'	77	3.3	3.3
	12.5'	52	4.0	4.0
NARROW FLOOD	5.0'	180	2.2	2.0
	7.5'	94	2.9	2.8
	10.0'	57	3.8	3.6
	12.5'	38	4.6	4.5
MEDIUM FLOOD	5.0'	140	2.3	2.3
	7.5'	71	3.3	3.1
	10.0'	42	4.3	4.1
	12.5'	28	5.2	5.2
FLOOD	5.0'	127	2.5	2.3
	7.5'	64	3.6	3.2
	10.0'	38	4.6	4.2
	12.5'	25	5.8	5.4