

Abilene 13" Series



PROJECT:

TYPE:

Features

Aluminum light poles with a decorative base, featuring a choice of extruded shafts. Accepts a wide variety of Amerlux post top luminaires.

13" diameter fluted and tapered aluminum base cast from a permanent mold.

Product Overview

Type: Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height: 8', 10', 12', 14', 16'
Shaft Size: 4" OD



Certifications



Fixture Summary

Choice of Extruded Shafts:

- 4" OD fluted (12 flutes), 0.125 wall
- 4" OD smooth round, 0.125 wall

Extruded shaft is circumferentially welded to the structural base.

Access door for anchor bolts and wiring is secured with stainless steel screws.

Ground lug provided inside base.

Materials:

Base - Cast aluminum (356-T6)

Shaft - Extruded aluminum (6063-T6)

Anchor Bolts - Hot dipped galvanized steel, ordered separately

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

Options/Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Direct burial extension

Abilene 13" Series



PROJECT:

TYPE:

Ordering Information - Pole

1	2	3	4
1 Model	2 Pole Height	3 Finish	4 Options
AP1103 4" O.D. fluted pole, 0.125 wall	08 8'-0"	BLK satin black	GFCI-TOP ground fault circuit protected outlet, placed 6" from the top of pole
AP1104 4" O.D. smooth pole, 0.125 wall	10 10'-0"	CLB classic bronze	GFCI-BTM ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of pole
	12 12'-0"	GBZ gloss textured bronze	LT less tenon
	14 14'-0"	GRN green	DB direct burial extension
	16 16'-0"	GTB gloss textured black	
		TBK textured black	
		TGR gloss textured green	
		CSTM custom, consult factory	

Ordering Information - Anchor Bolt (ordered separately, can be pre-shipped upon request)

AP1100-555-0018

1

1 Model
AP1100-555-0018 3/4" x 17" anchor bolt (4 included)

Ordering Information - Accessories (ordered separately)

1	2
1 Model (all accessories below are for non-tapered shafts only)	2 Finish
BA18-FRC4 18" banner arm, 4" OD shaft	BLK satin black
BA24-FRC4 24" banner arm, 4" OD shaft	CLB classic bronze
2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft	GBZ gloss textured bronze
2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft	GRN green
FPH-4 flag pole holder for 4" non-tapered poles	GBT gloss textured black
	TBK textured black
	TGR gloss textured green
	CSTM custom, consult factory

Abilene 13" Series




PROJECT:

TYPE:


Product Details


4" O.D. Fluted
0.125 wall

 Shaft Detail
4" O.D. Smooth
0.125 wall

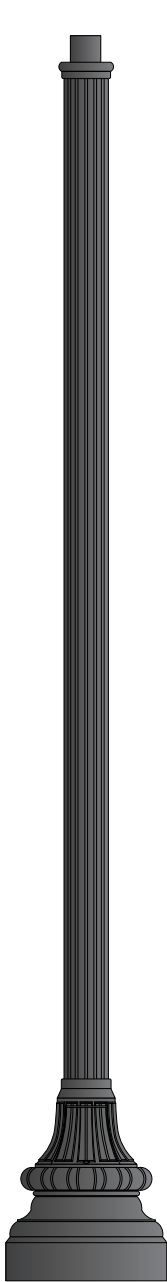

AP1103.XX

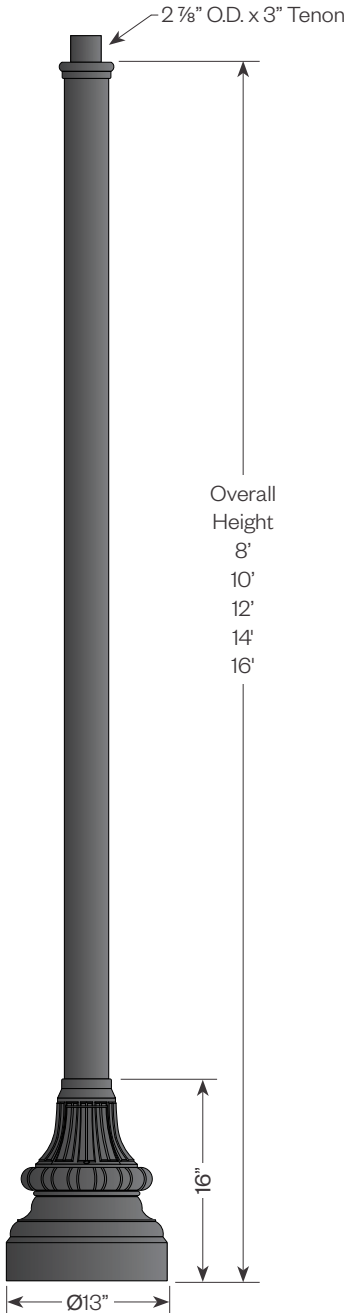

AP1104.XX


Abilene 13" Series



PROJECT:

TYPE:

Product Details (continued)

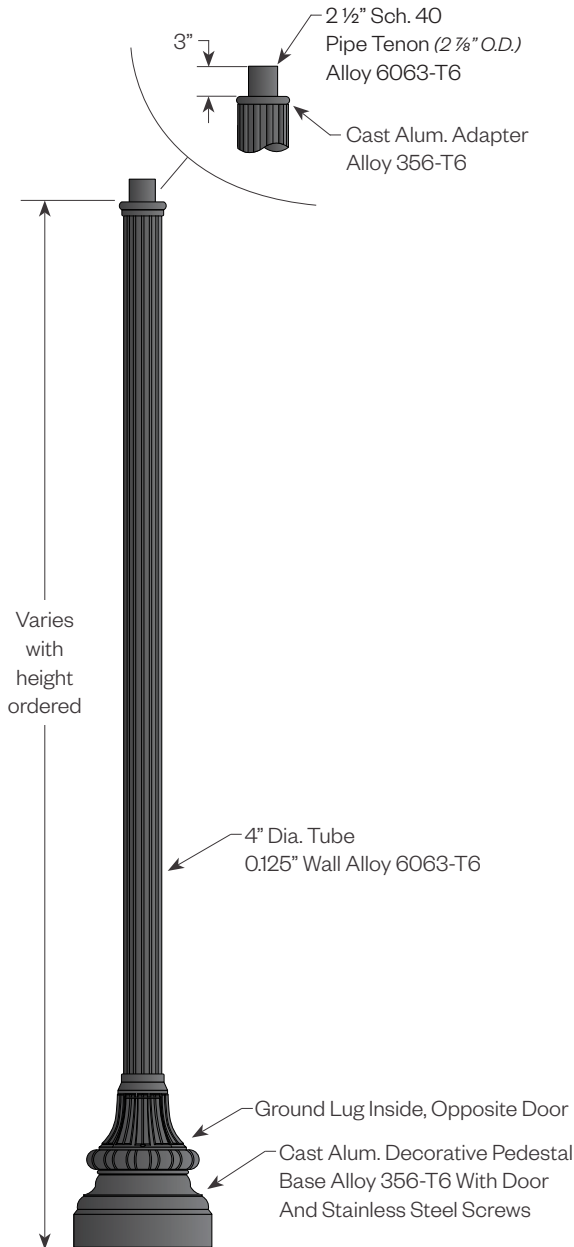

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (*additional charges apply*).

BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green

GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green

Options/Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4" OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD non-tapered pole.




GFCI - TOP/BOTTOM

Covered ground fault circuit protected duplex outlet.


Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.



Direct Burial

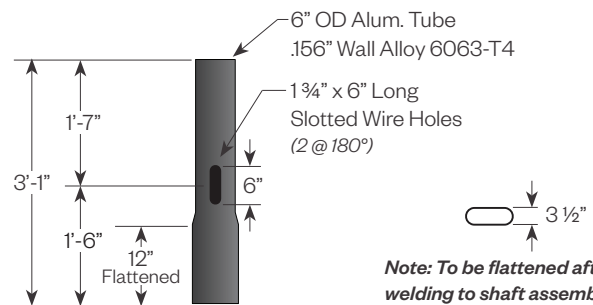

GFCI Orientation Guide

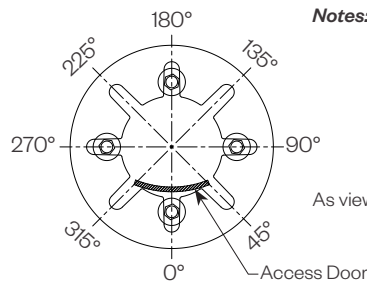


Notes: 1. GFCI placed at 0° unless otherwise specified.

2. Orientation of additional accessories must be specified when ordering.

As viewed from above.

Anchor Details

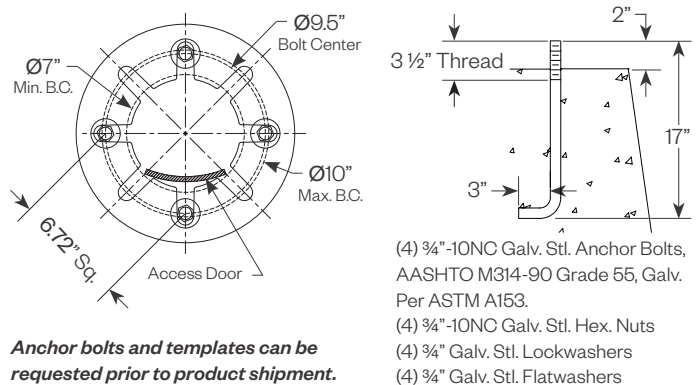

Delta Intelligent Building Technologies